
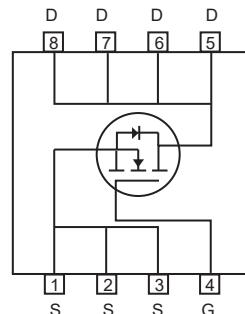


N-Channel Enhancement Mode Field Effect Transistor

FEATURES

- 30V, 324A, $R_{DS(ON)} = 0.62\text{m}\Omega$ @ $V_{GS} = 10\text{V}$.
 $R_{DS(ON)} = 0.95\text{ m}\Omega$ @ $V_{GS} = 4.5\text{V}$.
- Super high dense cell design for extremely low $R_{DS(ON)}$.
- High power and current handing capability.
- Pb-free lead plating ; RoHS compliant.
- Halogen Free.
- Surface mount Package.

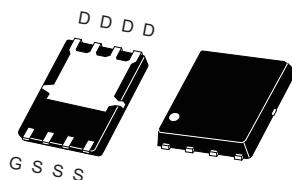

P-PAK 5X6

ABSOLUTE MAXIMUM RATINGS $T_C = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	$I_D @ R_{\theta JC}$	324	A
	$I_D @ R_{\theta JA}$	79	A
Drain Current-Pulsed ^a	$I_{DM} @ R_{\theta JC}$	1296	A
	$I_{DM} @ R_{\theta JA}$	316	A
Maximum Power Dissipation	P_D	104	W
Single Pulsed Avalanche Energy ^d	E_{AS}	420	mJ
Single Pulsed Avalanche Current ^d	I_{AS}	29	A
Operating and Store Temperature Range	T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Limit	Units
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.2	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	20	$^\circ\text{C/W}$









CEZ06C3

Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	30			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 30\text{V}, V_{\text{GS}} = 0\text{V}$		1		μA
Gate Body Leakage Current, Forward	I_{GSSF}	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0\text{V}$		100		nA
Gate Body Leakage Current, Reverse	I_{GSSR}	$V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0\text{V}$		-100		nA
On Characteristics ^b						
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}} = V_{\text{DS}}, I_D = 250\mu\text{A}$	1		3	V
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = 10\text{V}, I_D = 20\text{A}$		0.48	0.62	$\text{m}\Omega$
		$V_{\text{GS}} = 4.5\text{V}, I_D = 20\text{A}$		0.72	0.95	$\text{m}\Omega$
Gate input resistance	R_g	f=1MHz,open Drain		2.9		Ω
Dynamic Characteristics ^c						
Input Capacitance	C_{iss}	$V_{\text{DS}} = 15\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		8740		pF
Output Capacitance	C_{oss}			3465		pF
Reverse Transfer Capacitance	C_{rss}			180		pF
Switching Characteristics ^c						
Turn-On Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = 15\text{V}, I_D = 20\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 4.5\Omega$		34		ns
Turn-On Rise Time	t_r			17		ns
Turn-Off Delay Time	$t_{\text{d}(\text{off})}$			113		ns
Turn-Off Fall Time	t_f			65		ns
Total Gate Charge	Q_g	$V_{\text{DS}} = 15\text{V}, I_D = 20\text{A}, V_{\text{GS}} = 4.5\text{V}$		48		nC
Gate-Source Charge	Q_{gs}			15		nC
Gate-Drain Charge	Q_{gd}			24		nC
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Current	I_S				86	A
Drain-Source Diode Forward Voltage ^b	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_S = 1\text{A}$			1.2	V

Notes :

- a.Repetitive Rating : Pulse width limited by maximum junction temperature.
- b.Pulse Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.
- c.Guaranteed by design, not subject to production testing.
- d.L = 1mH, $I_{AS} = 29\text{A}$, $V_{DD} = 25\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$.

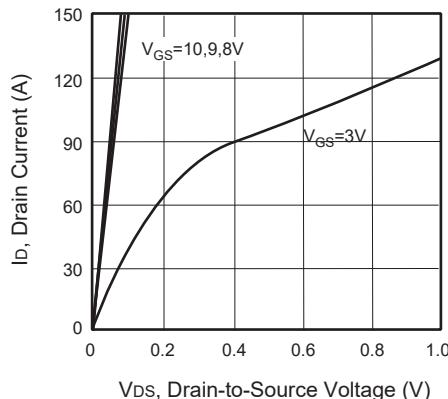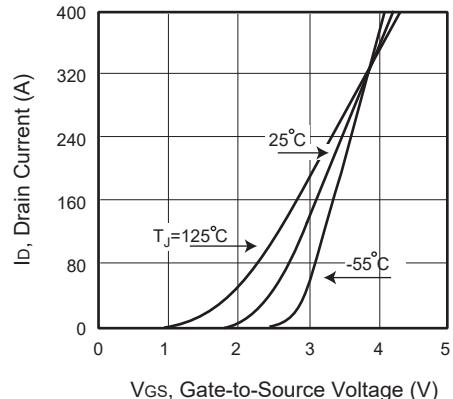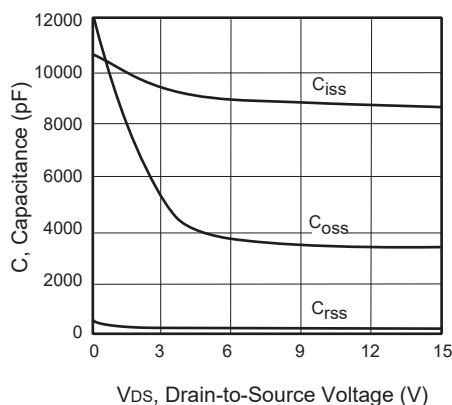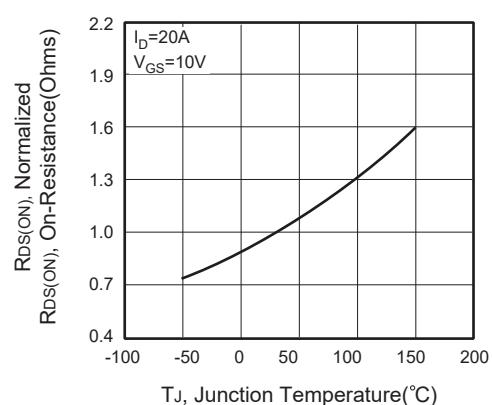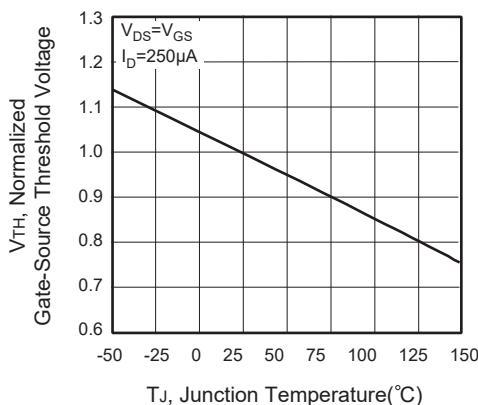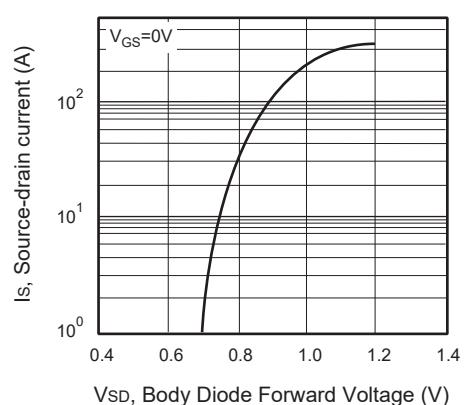**Figure 1. Output Characteristics****Figure 2. Transfer Characteristics****Figure 3. Capacitance****Figure 4. On-Resistance Variation with Temperature****Figure 5. Gate Threshold Variation with Temperature****Figure 6. Body Diode Forward Voltage Variation with Source Current**

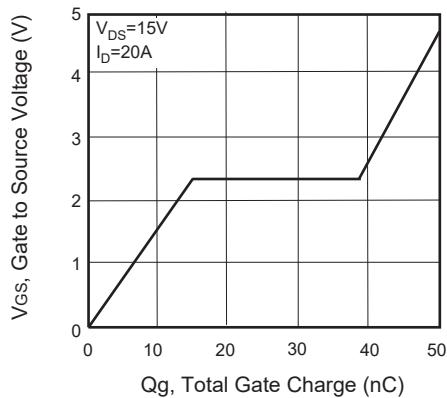


Figure 7. Gate Charge

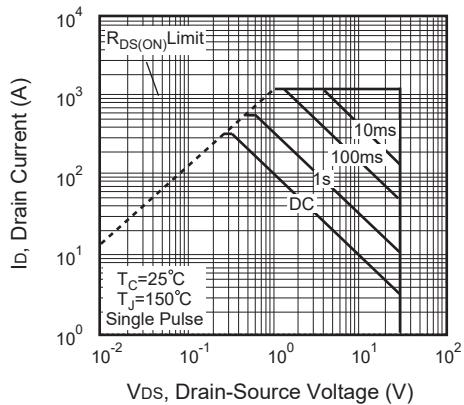


Figure 8. Maximum Safe Operating Area

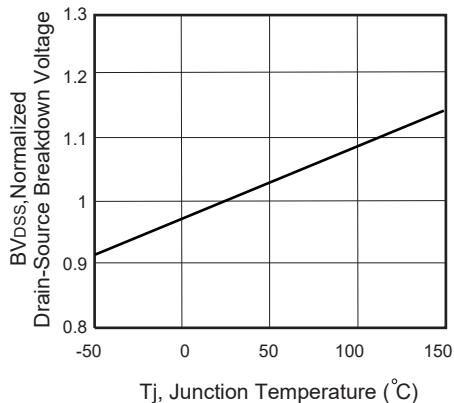


Figure 9. Breakdown Voltage Variation VS Temperature

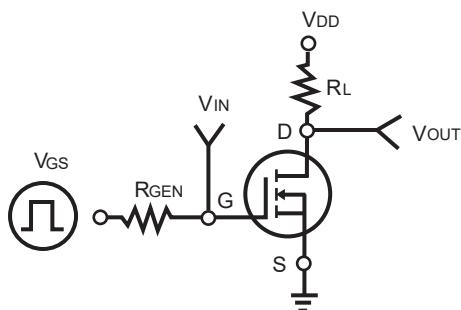


Figure 10. Switching Test Circuit

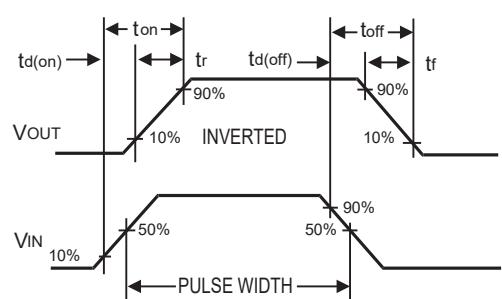


Figure 11. Switching Waveforms

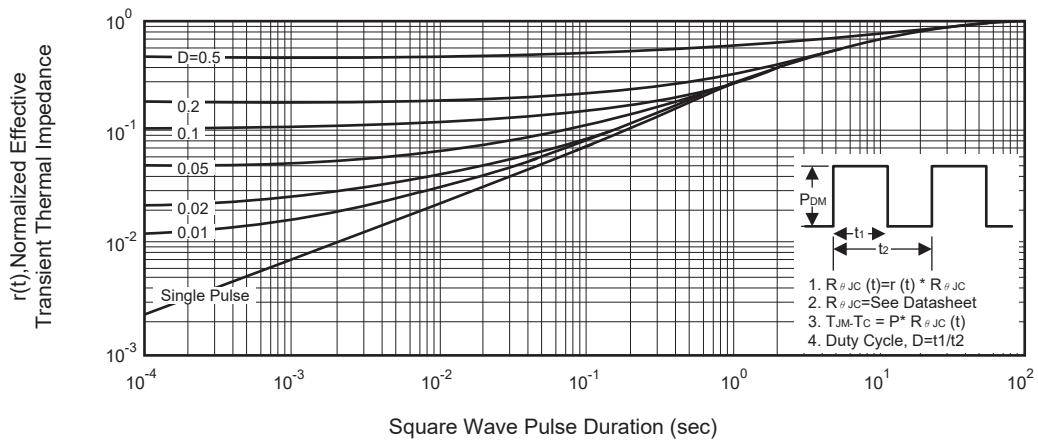
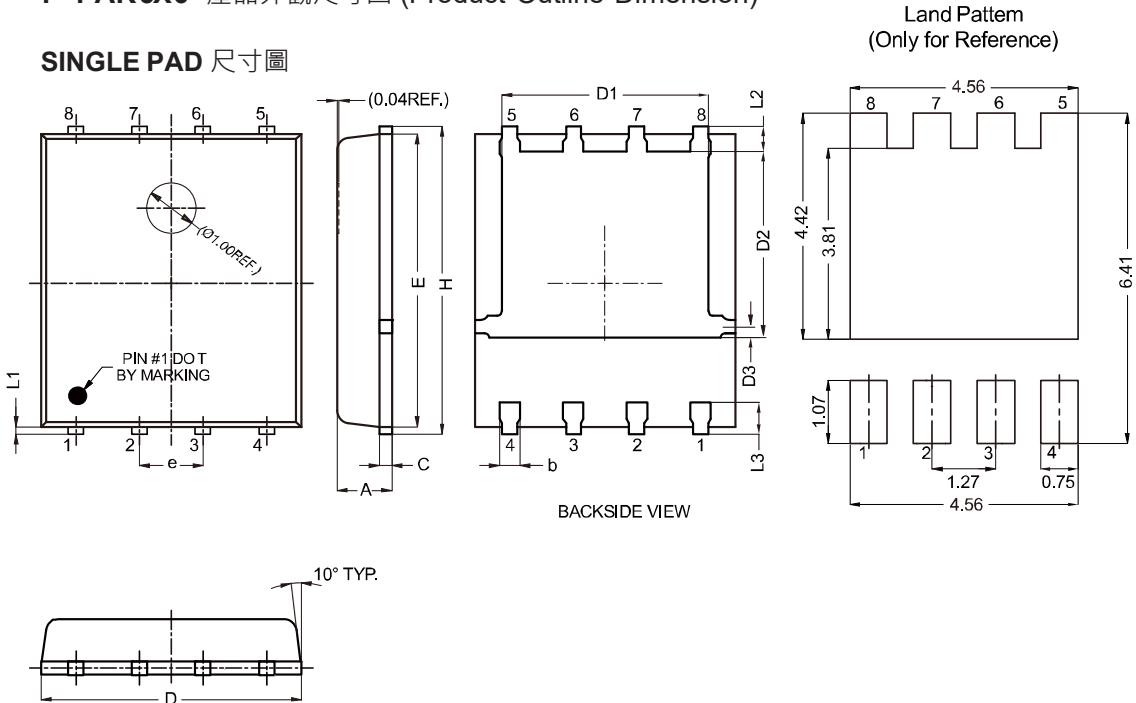


Figure 12. Normalized Thermal Transient Impedance Curve

**CEZ06C3****P-PAK5X6 產品外觀尺寸圖 (Product Outline Dimension)****SINGLE PAD 尺寸圖**

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.800	1.200	0.031	0.047
b	0.200	0.510	0.008	0.020
c	0.150	0.350	0.006	0.014
D	4.800	5.400	0.189	0.213
D1	3.610	4.400	0.142	0.173
D2	3.300	4.300	0.130	0.169
D3	0.396	0.600	0.016	0.024
E	5.400	6.100	0.213	0.240
e	1.270 TYP		0.050 TYP	
H	5.850	6.300	0.230	0.248
L1	0.080	0.330	0.003	0.013
L2	0.400	0.800	0.016	0.031
L3	0.460	0.740	0.018	0.029