


## N-Channel Enhancement Mode Field Effect Transistor

### FEATURES


- 65V, 49A,  $R_{DS(ON)} = 8.7\text{m}\Omega$  @ $V_{GS} = 10\text{V}$ .
- Super high dense cell design for extremely low  $R_{DS(ON)}$ .
- High power and current handing capability.
- Pb-free lead plating ; RoHS compliant.
- Halogen Free.
- Surface mount Package.

### Applications

- Synchronous Rectifier.
- DC DC Conversion.
- Load switch.

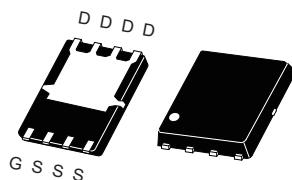

P-PAK 5X6

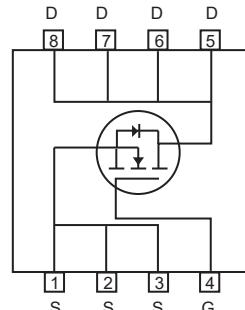

### ABSOLUTE MAXIMUM RATINGS $T_C = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	$V_{DS}$	65	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Drain Current-Continuous	$I_D @ R_{QJC}$	49	A
Drain Current-Continuous	$I_D @ R_{QJA}$	19	A
Drain Current-Pulsed <sup>a</sup>	$I_{DM} @ R_{QJC}$	196	A
Drain Current-Pulsed <sup>a</sup>	$I_{DM} @ R_{QJA}$	76	A
Maximum Power Dissipation	$P_D$	42	W
Single Pulsed Avalanche Energy <sup>e</sup>	$E_{AS}$	98	mJ
Single Pulsed Avalanche Current <sup>e</sup>	$I_{AS}$	14	A
Operating and Store Temperature Range	$T_J, T_{stg}$	-55 to 150	$^\circ\text{C}$

### Thermal Characteristics


Parameter	Symbol	Limit	Units
Thermal Resistance, Junction-to-Case	$R_{QJC}$	3	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Ambient <sup>b</sup>	$R_{QJA}$	20	$^\circ\text{C/W}$




# CEZ6R76

## Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted


Parameter	Symbol	Test Condition	Min	Typ	Max	Units
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	65			V
Zero Gate Voltage Drain Current	$I_{\text{DSS}}$	$V_{\text{DS}} = 65\text{V}, V_{\text{GS}} = 0\text{V}$			1	$\mu\text{A}$
Gate Body Leakage Current, Forward	$I_{\text{GSSF}}$	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0\text{V}$			100	nA
Gate Body Leakage Current, Reverse	$I_{\text{GSSR}}$	$V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0\text{V}$			-100	nA
<b>On Characteristics<sup>c</sup></b>						
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}} = V_{\text{DS}}, I_D = 250\mu\text{A}$	2		4	V
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = 10\text{V}, I_D = 10\text{A}$		7.3	8.7	$\text{m}\Omega$
<b>Dynamic Characteristics<sup>d</sup></b>						
Input Capacitance	$C_{\text{iss}}$	$V_{\text{DS}} = 25\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		910		pF
Output Capacitance	$C_{\text{oss}}$			205		pF
Reverse Transfer Capacitance	$C_{\text{rss}}$			25		pF
<b>Switching Characteristics<sup>d</sup></b>						
Turn-On Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = 30\text{V}, I_D = 13\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 6\Omega$		24		ns
Turn-On Rise Time	$t_r$			5		ns
Turn-Off Delay Time	$t_{\text{d}(\text{off})}$			38		ns
Turn-Off Fall Time	$t_f$			9		ns
Total Gate Charge	$Q_g$	$V_{\text{DS}} = 48\text{V}, I_D = 13\text{A}, V_{\text{GS}} = 10\text{V}$		22		nC
Gate-Source Charge	$Q_{\text{gs}}$			4		nC
Gate-Drain Charge	$Q_{\text{gd}}$			9		nC
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
Drain-Source Diode Forward Current	$I_S$				34	A
Drain-Source Diode Forward Voltage <sup>c</sup>	$V_{\text{SD}}$	$V_{\text{GS}} = 0\text{V}, I_S = 20\text{A}$			1.2	V
Notes :						
a.Repetitive Rating : Pulse width limited by maximum junction temperature.						
b.Surface Mounted on FR4 Board, $t \leq 10 \text{ sec}$ .						
c.Pulse Test : Pulse Width $\leq 300\mu\text{s}$ , Duty Cycle $\leq 2\%$ .						
d.Guaranteed by design, not subject to production testing.						
e. $L = 1\text{mH}, I_{AS} = 14\text{A}, V_{DD} = 24\text{V}, R_G = 25\Omega$ , Starting $T_J = 25^\circ\text{C}$ .						

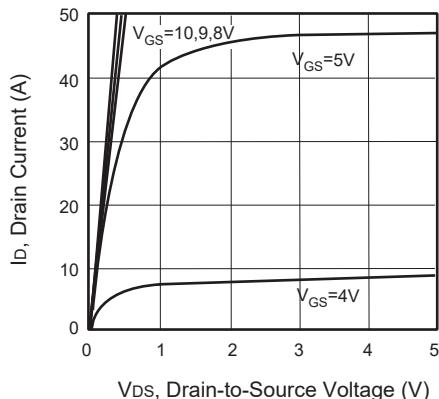


**Figure 1. Output Characteristics**

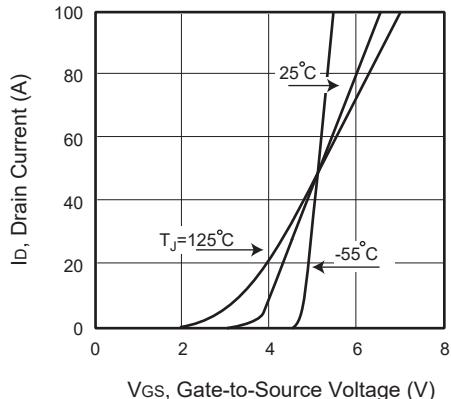


**Figure 2. Transfer Characteristics**

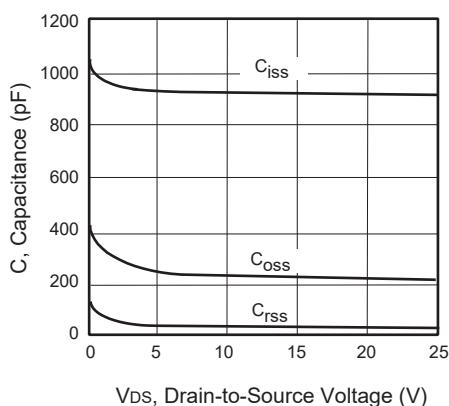


**Figure 3. Capacitance**

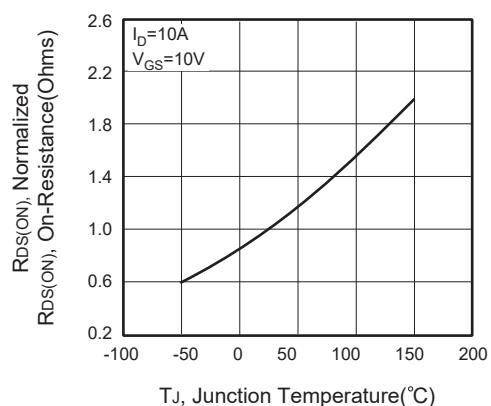


**Figure 4. On-Resistance Variation with Temperature**

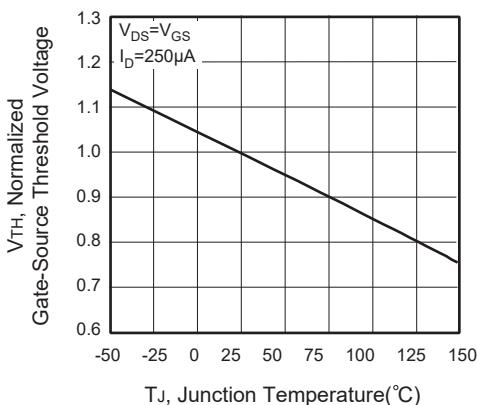


**Figure 5. Gate Threshold Variation with Temperature**

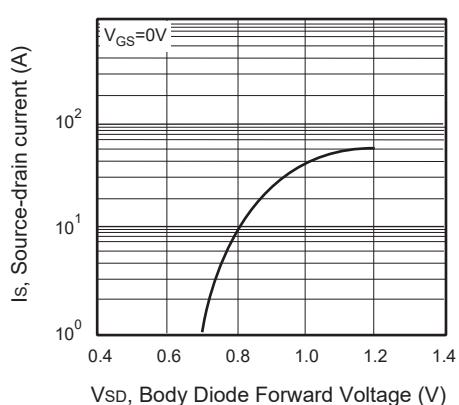


**Figure 6. Body Diode Forward Voltage Variation with Source Current**

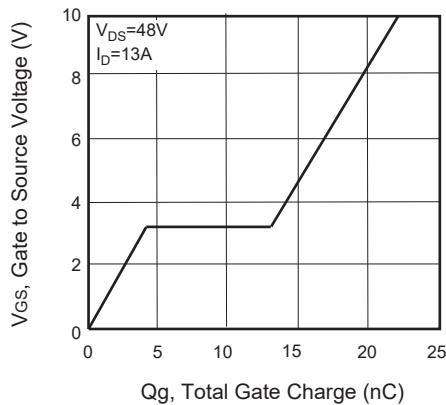


**Figure 7. Gate Charge**

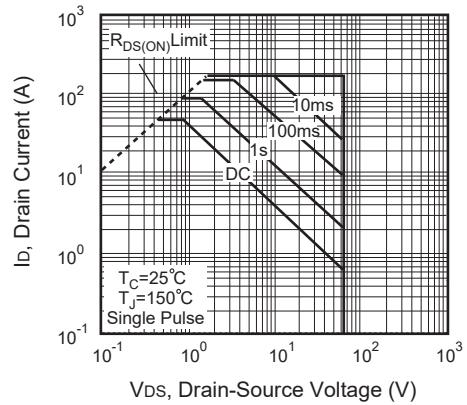


**Figure 8. Maximum Safe Operating Area**

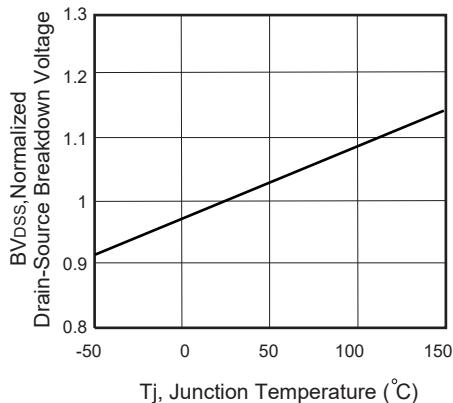

**Figure 9. Breakdown Voltage Variation VS Temperature**

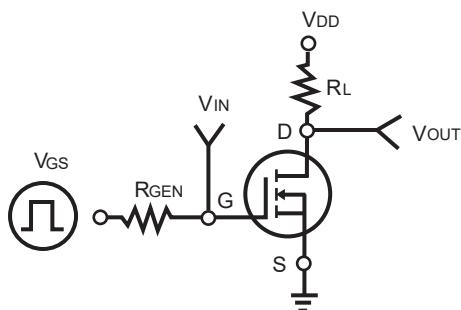

**Figure 10. Switching Test Circuit**

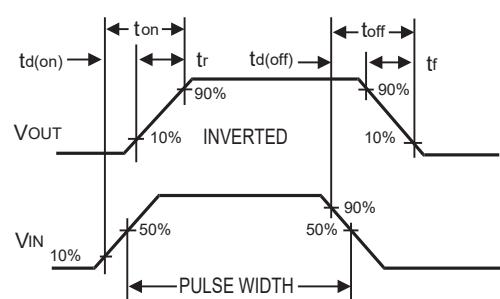

**Figure 11. Switching Waveforms**

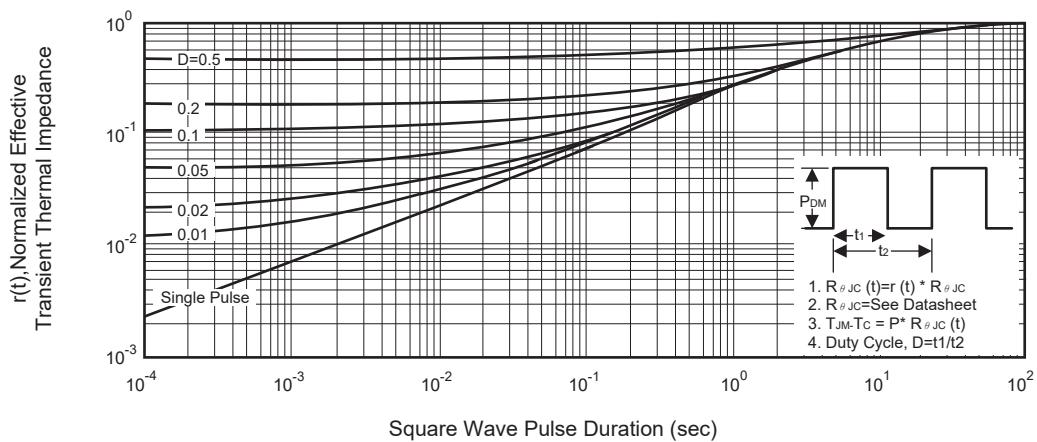
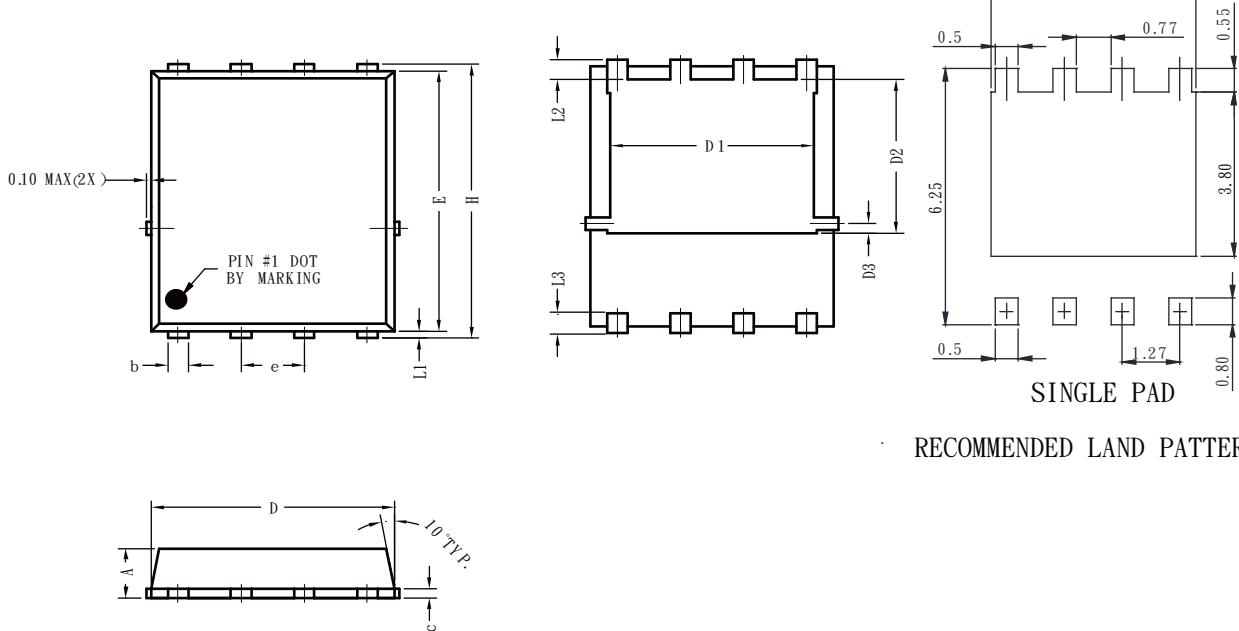


Figure 12. Normalized Thermal Transient Impedance Curve

**P-PAK5X6 產品外觀尺寸圖 (Product Outline Dimension)**
**SINGLE PAD 尺寸圖**


RECOMMENDED LAND PATTERN

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.800	1.170	0.031	0.046
b	0.340	0.490	0.013	0.019
c	0.20	0.34	0.008	0.013
D	4.800	5.100	0.009	0.011
D1	3.800	4.200	0.150	0.165
D2	3.180	3.78	0.125	0.149
D3	0.150	0.360	0.006	0.142
E	5.650	5.900	0.222	0.232
e	1.270 TYP		0.050 TYP	
H	5.900	6.150	0.232	0.242
L1	0.050	0.250	0.002	0.010
L2	0.380	0.620	0.015	0.024
L3	0.380	0.75	0.015	0.030