



**Dual Enhancement Mode Field Effect Transistor (N and P Channel)****FEATURES**

- 30V, 6.8A,  $R_{DS(ON)} = 28m\Omega$  @ $V_{GS} = 10V$ .  
 $R_{DS(ON)} = 42m\Omega$  @ $V_{GS} = 4.5V$ .
- -30V, -5.4A,  $R_{DS(ON)} = 45m\Omega$  @ $V_{GS} = -10V$ .  
 $R_{DS(ON)} = 80m\Omega$  @ $V_{GS} = -4.5V$ .
- Super high dense cell design for extremely low  $R_{DS(ON)}$ .
- High power and current handing capability.
- RoHS compliant.
- Surface mount Package.

**ABSOLUTE MAXIMUM RATINGS**  $T_A = 25^\circ C$  unless otherwise noted

Parameter	Symbol	N-Channel	P-Channel	Units
Drain-Source Voltage	$V_{DS}$	30	-30	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	$\pm 20$	V
Drain Current-Continuous@ $T_A = 25^\circ C$ @ $T_A = 70^\circ C$	$I_D$	6.8	-5.4	A
		5.4	-4.3	A
Drain Current-Pulsed <sup>a</sup>	$I_{DM}$	27	-21	A
Maximum Power Dissipation	$P_D$	2.0		W
Operating and Store Temperature Range	$T_J, T_{stg}$	-55 to 150		°C

**Thermal Characteristics**

Parameter	Symbol	Limit	Units
Thermal Resistance, Junction-to-Ambient <sup>b</sup>	$R_{\theta JA}$	62.5	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	40	°C/W

**CEM8958A****N-Channel Electrical Characteristics**  $T_A = 25^\circ\text{C}$  unless otherwise noted

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	30			V
Zero Gate Voltage Drain Current	$I_{\text{DSS}}$	$V_{\text{DS}} = 30\text{V}, V_{\text{GS}} = 0\text{V}$		1		$\mu\text{A}$
Gate Body Leakage Current, Forward	$I_{\text{GSSF}}$	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0\text{V}$		100		nA
Gate Body Leakage Current, Reverse	$I_{\text{GSSR}}$	$V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0\text{V}$		-100		nA
<b>On Characteristics</b>						
Gate Threshold Voltage	$V_{\text{GS(th)}}$	$V_{\text{GS}} = V_{\text{DS}}, I_D = 250\mu\text{A}$	1		2.5	V
Static Drain-Source On-Resistance	$R_{\text{DS(on)}}$	$V_{\text{GS}} = 10\text{V}, I_D = 6.8\text{A}$		20	28	$\text{m}\Omega$
		$V_{\text{GS}} = 4.5\text{V}, I_D = 6\text{A}$		28	42	$\text{m}\Omega$
<b>Dynamic Characteristics<sup>d</sup></b>						
Input Capacitance	$C_{\text{iss}}$	$V_{\text{DS}} = 15\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		345		pF
Output Capacitance	$C_{\text{oss}}$			105		pF
Reverse Transfer Capacitance	$C_{\text{rss}}$			70		pF
<b>Switching Characteristics<sup>d</sup></b>						
Turn-On Delay Time	$t_{\text{d(on)}}$	$V_{\text{DD}} = 15\text{V}, I_D = 6.8\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 2.7\Omega$		8		ns
Turn-On Rise Time	$t_r$			5		ns
Turn-Off Delay Time	$t_{\text{d(off)}}$			29		ns
Turn-Off Fall Time	$t_f$			8		ns
Total Gate Charge	$Q_g$	$V_{\text{DS}} = 15\text{V}, I_D = 6.8\text{A}, V_{\text{GS}} = 10\text{V}$		10.7		nC
Gate-Source Charge	$Q_{\text{gs}}$			0.7		nC
Gate-Drain Charge	$Q_{\text{gd}}$			3.3		nC
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
Drain-Source Diode Forward Current <sup>b</sup>	$I_S$				1.3	A
Drain-Source Diode Forward Voltage <sup>c</sup>	$V_{\text{SD}}$	$V_{\text{GS}} = 0\text{V}, I_S = 1.3\text{A}$			1.2	V

**Notes :**

a.Repetitive Rating : Pulse width limited by maximum junction temperature.

b.Surface Mounted on FR4 Board,  $t \leq 10 \text{ sec}$ .c.Pulse Test : Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .

d.Guaranteed by design, not subject to production testing.



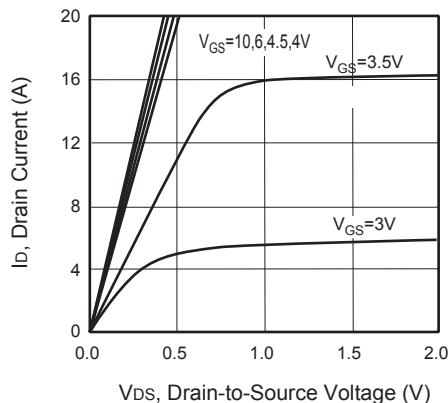
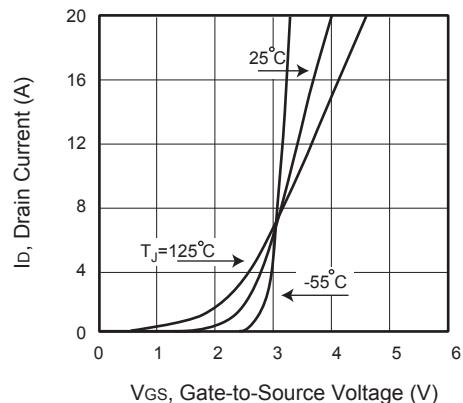
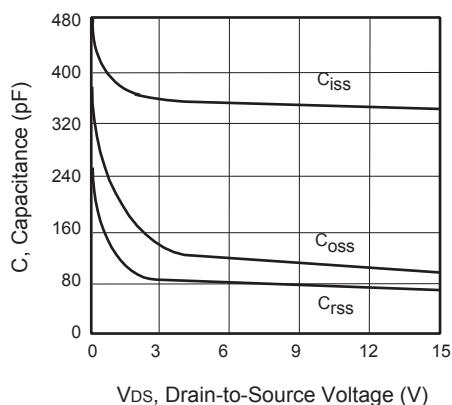
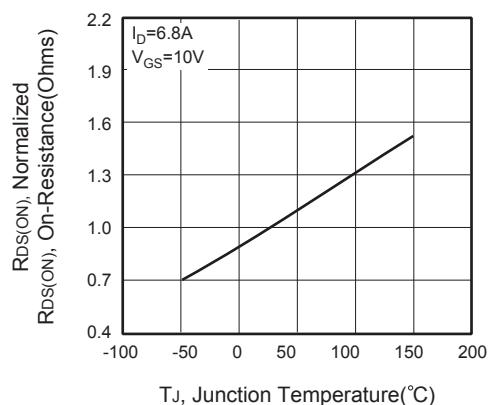
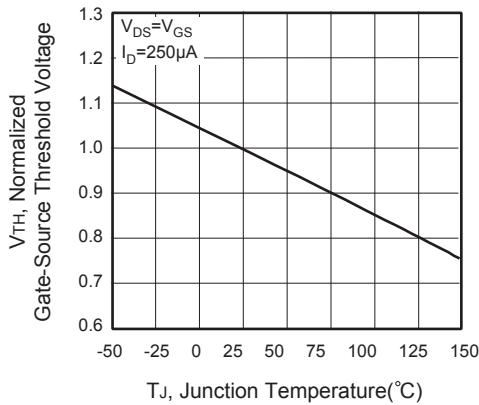
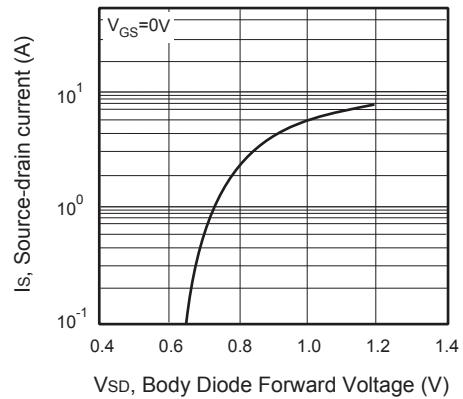
# CEM8958A

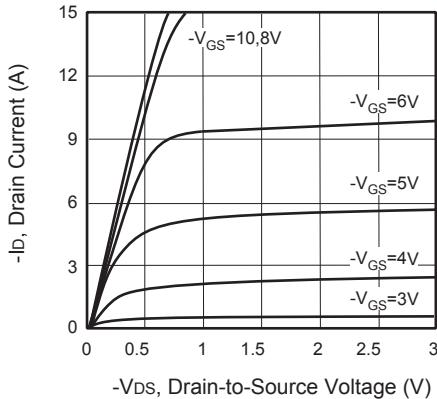
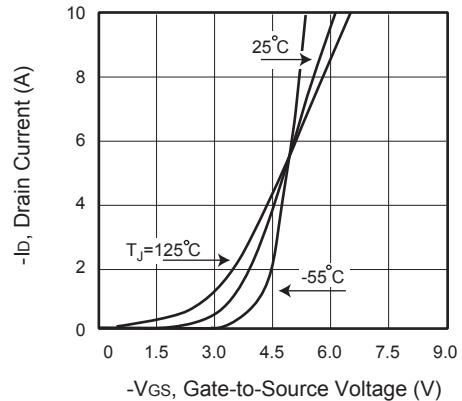
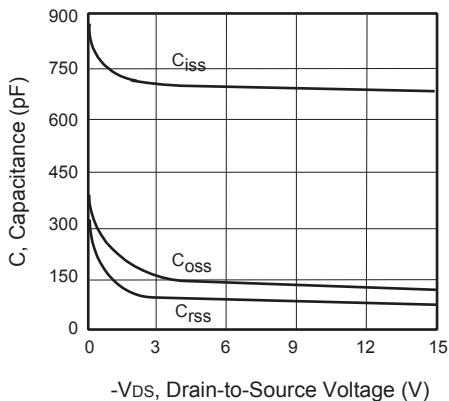
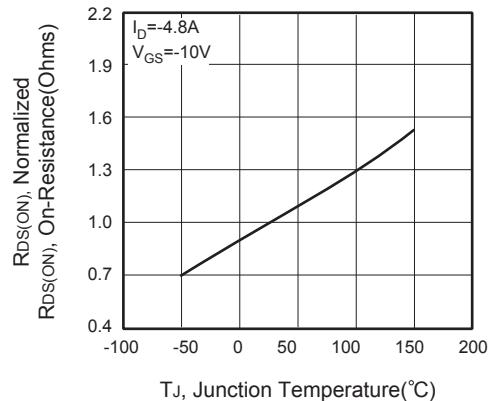
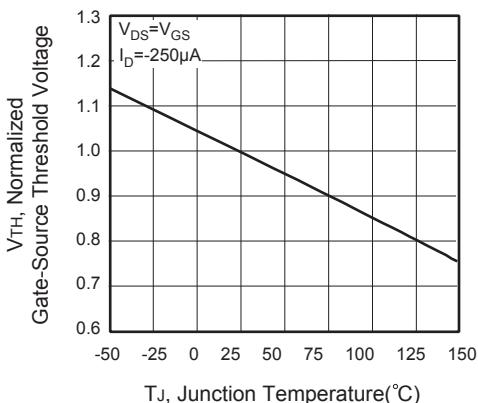
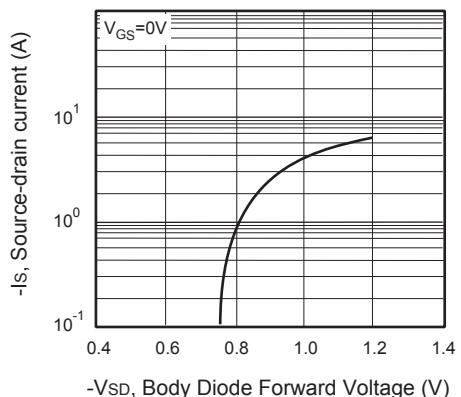
## P-Channel Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

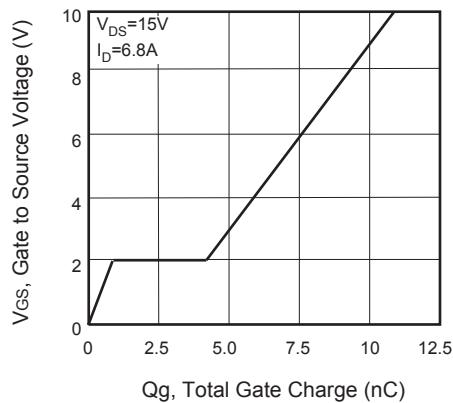
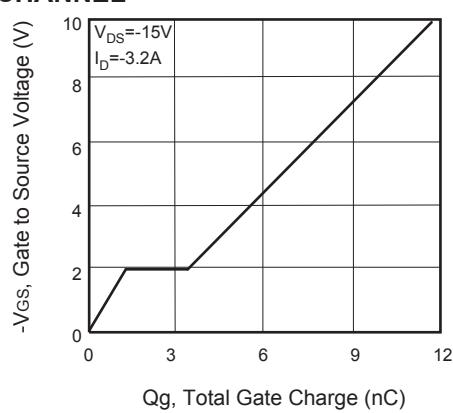
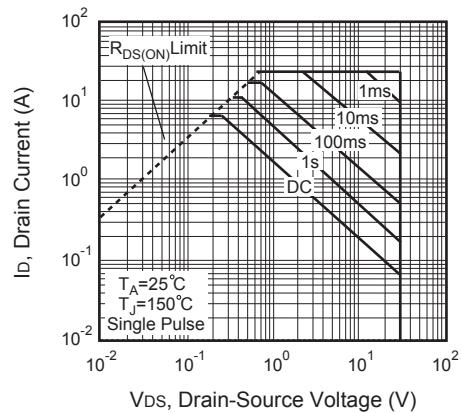
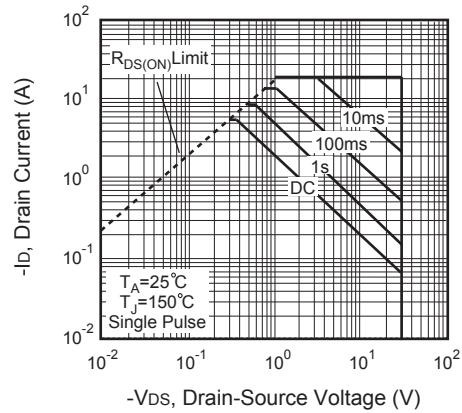
Parameter	Symbol	Test Condition	Min	Typ	Max	Units
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_{\text{D}} = -250\mu\text{A}$	-30			V
Zero Gate Voltage Drain Current	$I_{\text{DSS}}$	$V_{\text{DS}} = -30\text{V}, V_{\text{GS}} = 0\text{V}$			-1	$\mu\text{A}$
Gate Body Leakage Current, Forward	$I_{\text{GSSF}}$	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0\text{V}$			100	nA
Gate Body Leakage Current, Reverse	$I_{\text{GSSR}}$	$V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0\text{V}$			-100	nA
<b>On Characteristics</b>						
Gate Threshold Voltage	$V_{\text{GS(th)}}$	$V_{\text{GS}} = V_{\text{DS}}, I_{\text{D}} = -250\mu\text{A}$	-1		-2.5	V
Static Drain-Source On-Resistance	$R_{\text{DS(on)}}$	$V_{\text{GS}} = -10\text{V}, I_{\text{D}} = -4.8\text{A}$		36	45	$\text{m}\Omega$
		$V_{\text{GS}} = -4.5\text{V}, I_{\text{D}} = -3.5\text{A}$		60	80	$\text{m}\Omega$
<b>Dynamic Characteristics<sup>d</sup></b>						
Input Capacitance	$C_{\text{iss}}$	$V_{\text{DS}} = -15\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		675		pF
Output Capacitance	$C_{\text{oss}}$			120		pF
Reverse Transfer Capacitance	$C_{\text{rss}}$			75		pF
<b>Switching Characteristics<sup>d</sup></b>						
Turn-On Delay Time	$t_{\text{d(on)}}$	$V_{\text{DD}} = -15\text{V}, I_{\text{D}} = -1\text{A}, V_{\text{GS}} = -10\text{V}, R_{\text{GEN}} = 6\Omega$		12		ns
Turn-On Rise Time	$t_{\text{r}}$			4		ns
Turn-Off Delay Time	$t_{\text{d(off)}}$			54		ns
Turn-Off Fall Time	$t_{\text{f}}$			9		ns
Total Gate Charge	$Q_{\text{g}}$	$V_{\text{DS}} = -15\text{V}, I_{\text{D}} = -3.2\text{A}, V_{\text{GS}} = -10\text{V}$		11.5		nC
Gate-Source Charge	$Q_{\text{gs}}$			1.3		nC
Gate-Drain Charge	$Q_{\text{gd}}$			2.3		nC
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
Drain-Source Diode Forward Current <sup>b</sup>	$I_{\text{s}}$				-1.3	A
Drain-Source Diode Forward Voltage <sup>c</sup>	$V_{\text{SD}}$	$V_{\text{GS}} = 0\text{V}, I_{\text{s}} = -1.3\text{A}$			-1.2	V

**Notes :**

- a.Repetitive Rating : Pulse width limited by maximum junction temperature.
- b.Surface Mounted on FR4 Board,  $t \leq 10 \text{ sec.}$
- c.Pulse Test : Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .
- d.Guaranteed by design, not subject to production testing.

**N-CHANNEL**

**Figure 1. Output Characteristics**

**Figure 2. Transfer Characteristics**

**Figure 3. Capacitance**

**Figure 4. On-Resistance Variation with Temperature**

**Figure 5. Gate Threshold Variation with Temperature**

**Figure 6. Body Diode Forward Voltage Variation with Source Current**

**P-CHANNEL**

**Figure 7. Output Characteristics**

**Figure 8. Transfer Characteristics**

**Figure 9. Capacitance**

**Figure 10. On-Resistance Variation with Temperature**

**Figure 11. Gate Threshold Variation with Temperature**

**Figure 12. Body Diode Forward Voltage Variation with Source Current**

**N-CHANNEL**

**Figure 13. Gate Charge**
**P-CHANNEL**

**Figure 15. Gate Charge**

**Figure 14. Maximum Safe Operating Area**

**Figure 16. Maximum Safe Operating Area**

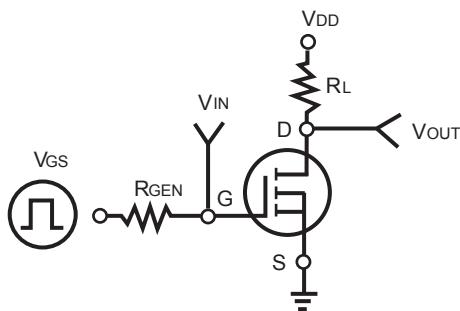


Figure 17. Switching Test Circuit

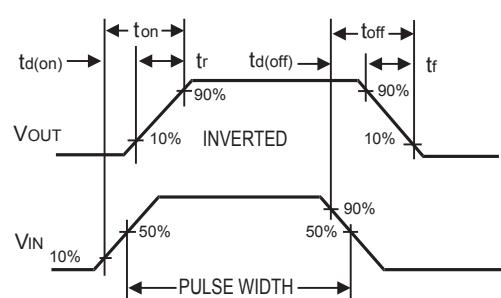


Figure 18. Switching Waveforms

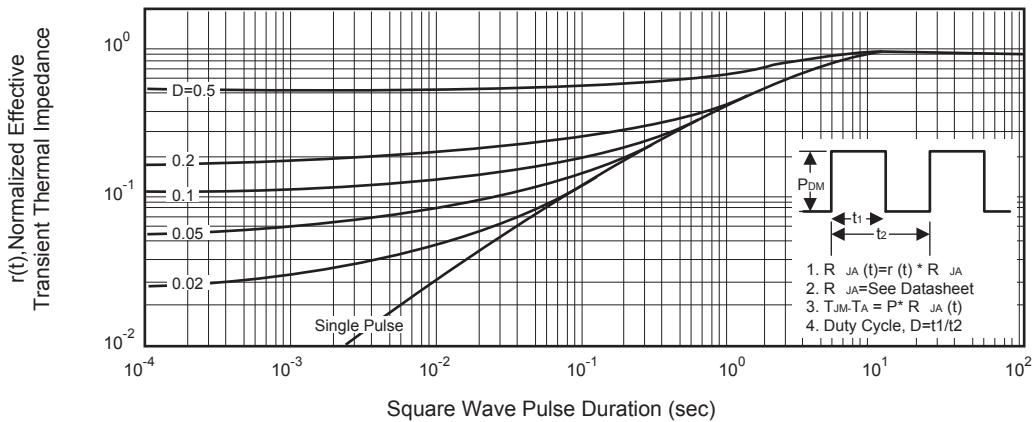


Figure 19. Normalized Thermal Transient Impedance Curve