





CEP14A04A/CEB14A04A

N-Channel Enhancement Mode Field Effect Transistor

FEATURES

- 40V, 163A, $R_{DS(ON)} = 2.6\text{m}\Omega$ @ $V_{GS} = 10\text{V}$.
- Super high dense cell design for extremely low $R_{DS(ON)}$.
- High power and current handing capability.
- Pb-free lead plating ; RoHS compliant.
- Halogen Free.
- TO-220 & TO-263 package.



ABSOLUTE MAXIMUM RATINGS $T_C = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V_{DS}	40	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous @ $T_C = 25^\circ\text{C}$	I_D	163	A
Drain Current-Continuous @ $T_C = 100^\circ\text{C}$		103	A
Drain Current-Pulsed ^a	I_{DM}	652	A
Maximum Power Dissipation @ $T_C = 25^\circ\text{C}$ - Derate above 25°C	P_D	125 1	W W/ $^\circ\text{C}$
Single Pulsed Avalanche Energy ^d	E_{AS}	378	mJ
Single Pulsed Avalanche Current ^d	I_{AS}	87	A
Operating and Store Temperature Range	T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Limit	Units
Thermal Resistance, Junction-to-Case	R_{\thetaJC}	1	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Ambient	R_{\thetaJA}	62.5	$^\circ\text{C}/\text{W}$



CEP14A04A/CEB14A04A

Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	40			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 40\text{V}, V_{\text{GS}} = 0\text{V}$			1	μA
Gate Body Leakage Current, Forward	I_{GSSF}	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0\text{V}$			100	nA
Gate Body Leakage Current, Reverse	I_{GSSR}	$V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0\text{V}$			-100	nA
On Characteristics^b						
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}} = V_{\text{DS}}, I_D = 250\mu\text{A}$	2		4	V
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = 10\text{V}, I_D = 30\text{A}$		2.2	2.6	$\text{m}\Omega$
Gate Input Resistance	R_g	f=1MHz,open Drain		1		Ω
Dynamic Characteristics^c						
Input Capacitance	C_{iss}	$V_{\text{DS}} = 25\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		8700		pF
Output Capacitance	C_{oss}			695		pF
Reverse Transfer Capacitance	C_{rss}			480		pF
Switching Characteristics^c						
Turn-On Delay Time	$t_{d(\text{on})}$	$V_{\text{DD}} = 28\text{V}, I_D = 10\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 4.5\Omega$		41		ns
Turn-On Rise Time	t_r			17		ns
Turn-Off Delay Time	$t_{d(\text{off})}$			88		ns
Turn-Off Fall Time	t_f			30		ns
Total Gate Charge	Q_g	$V_{\text{DS}} = 32\text{V}, I_D = 20\text{A}, V_{\text{GS}} = 10\text{V}$		139		nC
Gate-Source Charge	Q_{gs}			29		nC
Gate-Drain Charge	Q_{gd}			48		nC
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Current	I_S				104	A
Drain-Source Diode Forward Voltage ^b	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_S = 10\text{A}$			1.2	V
Notes :						
a.Repetitive Rating : Pulse width limited by maximum junction temperature .						
b.Pulse Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.						
c.Guaranteed by design, not subject to production testing.						
d.L = 0.1mH, $I_{AS} = 87\text{A}$, $V_{DD} = 24\text{V}$, $R_G = 25\Omega$. Starting $T_J = 25^\circ\text{C}$.						

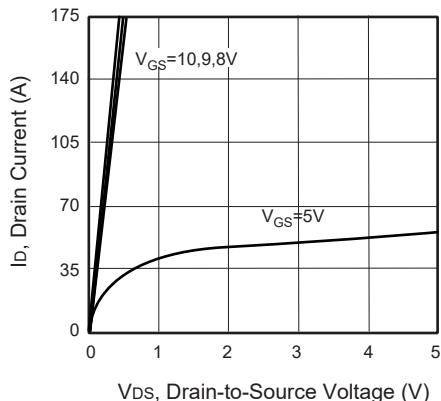


Figure 1. Output Characteristics

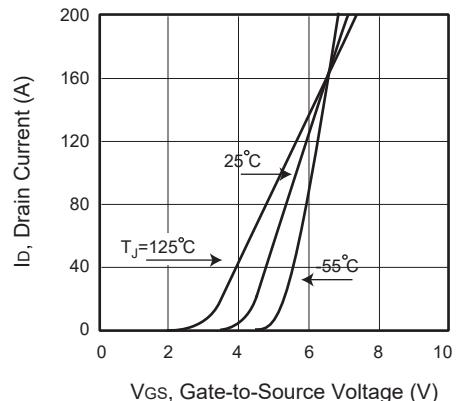


Figure 2. Transfer Characteristics

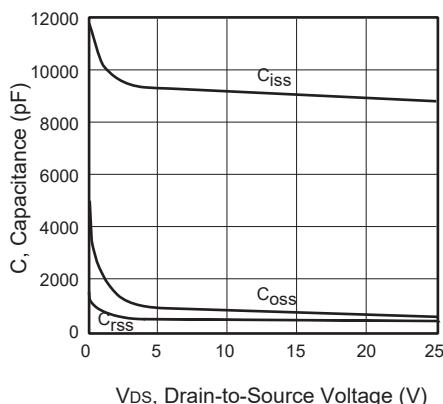


Figure 3. Capacitance

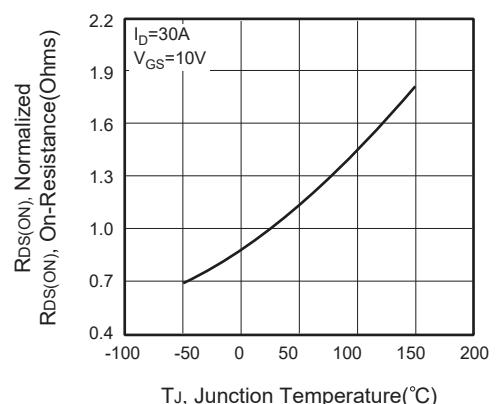


Figure 4. On-Resistance Variation with Temperature

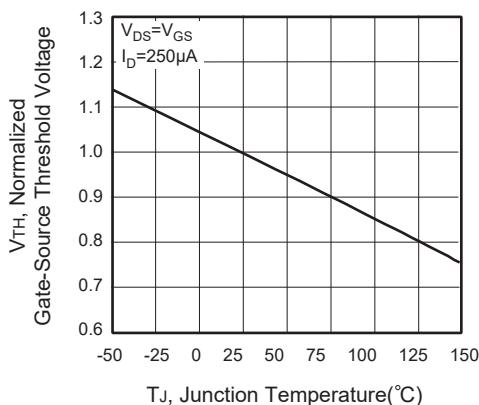


Figure 5. Gate Threshold Variation with Temperature

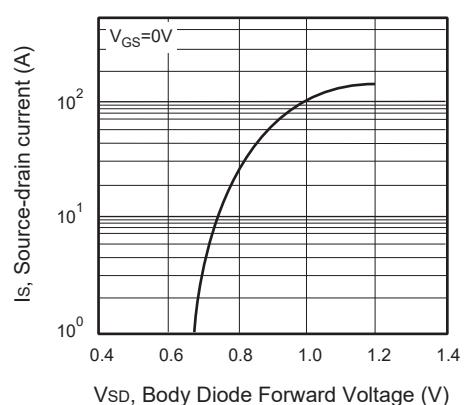


Figure 6. Body Diode Forward Voltage Variation with Source Current

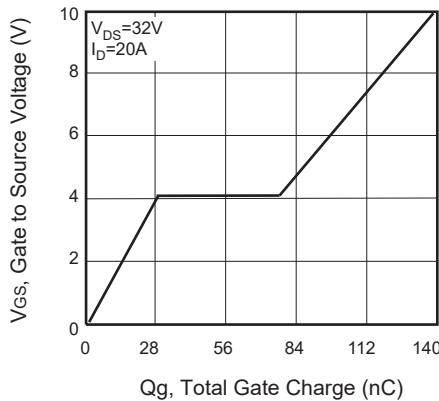


Figure 7. Gate Charge

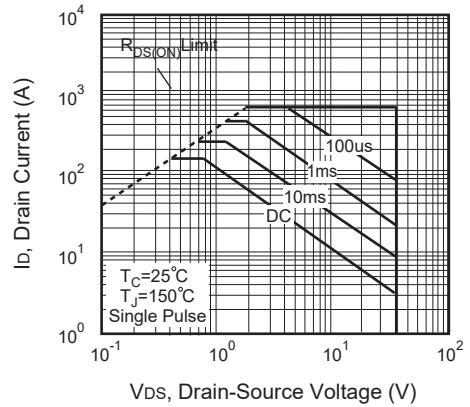


Figure 8. Maximum Safe Operating Area

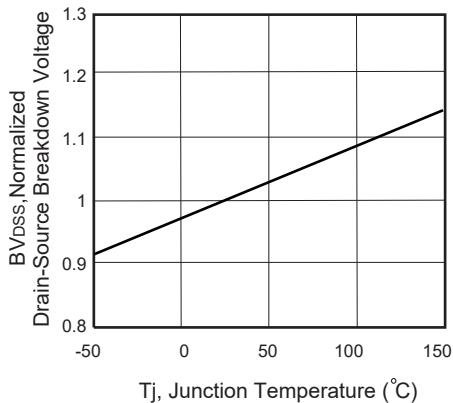


Figure 9. Breakdown Voltage Variation VS Temperature

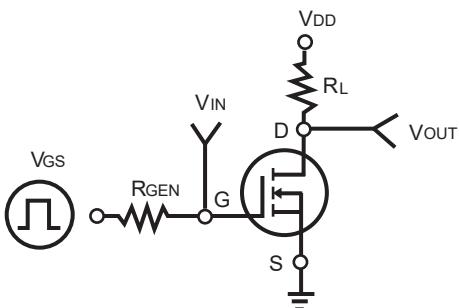


Figure 10. Switching Test Circuit

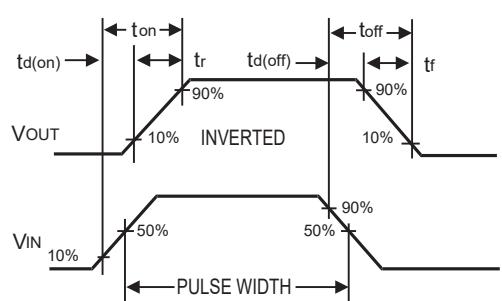


Figure 11. Switching Waveforms



CEP14A04A/CEB14A04A

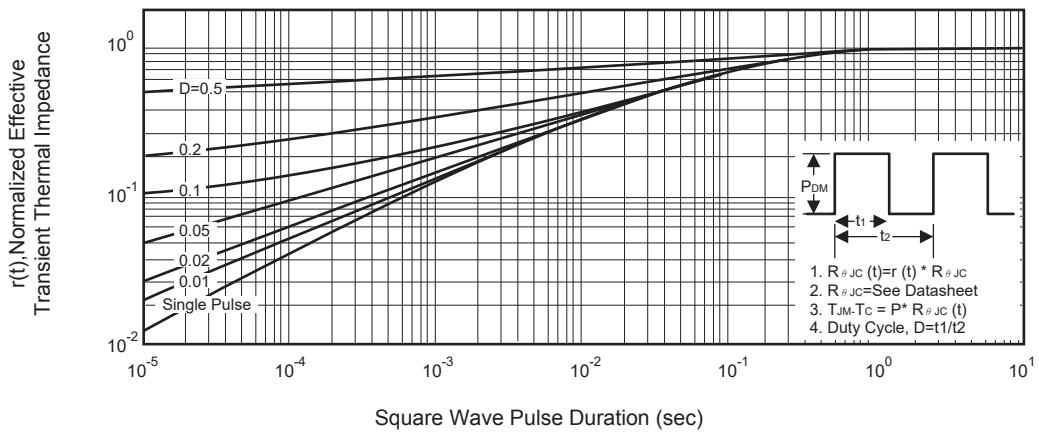


Figure 12. Normalized Thermal Transient Impedance Curve