




CED2215/CEU2215

N-Channel Enhancement Mode Field Effect Transistor

FEATURES

- 150V, 22A, $R_{DS(ON)} = 80\text{m}\Omega$ @ $V_{GS} = 10\text{V}$.
 $R_{DS(ON)} = 90\text{m}\Omega$ @ $V_{GS} = 7\text{V}$.
- Super high dense cell design for extremely low $R_{DS(ON)}$.
- High power and current handing capability.
- RoHS compliant.
- TO-251 & TO-252 package.

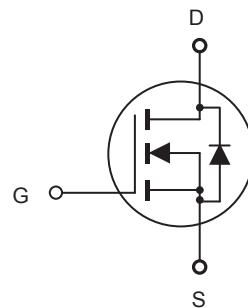

ABSOLUTE MAXIMUM RATINGS $T_C = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Limit	Units
Gate-Source Voltage	V_{GS}	± 30	V
Drain Current-Continuous@ $T_C = 25^\circ\text{C}$ □ @ $T_C = 100^\circ\text{C}$	I_D	22 16	A
Drain Current-Pulsed ^a	I_{DM}	88	A
Maximum Power Dissipation @ $T_C = 25^\circ\text{C}$ - Derate above 25°C	P_D	100 0.66	W W/ $^\circ\text{C}$
Single Pulsed Avalanche Energy ^d	E_{AS}	3.2	mJ
Single Pulsed Avalanche Current ^d	I_{AS}	8	A
Operating and Store Temperature Range	T_J, T_{Stg}	-55 to 175	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Limit	Units
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.5	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	50	$^\circ\text{C/W}$



CED2215/CEU2215

Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	135	150		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 135\text{V}, V_{\text{GS}} = 0\text{V}$		1		μA
Gate Body Leakage Current, Forward	I_{GSSF}	$V_{\text{GS}} = 30\text{V}, V_{\text{DS}} = 0\text{V}$		100		nA
Gate Body Leakage Current, Reverse	I_{GSSR}	$V_{\text{GS}} = -30\text{V}, V_{\text{DS}} = 0\text{V}$		-100		nA
On Characteristics^b						
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}} = V_{\text{DS}}, I_D = 250\mu\text{A}$	2		4	V
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = 10\text{V}, I_D = 10\text{A}$		60	80	$\text{m}\Omega$
		$V_{\text{GS}} = 7\text{V}, I_D = 10\text{A}$		62	90	$\text{m}\Omega$
Gate Inout resistance	R_g	f=1MHz, open Drain		1		Ω
Dynamic Characteristics^c						
Input Capacitance	C_{iss}	$V_{\text{DS}} = 75\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		1205		pF
Output Capacitance	C_{oss}			105		pF
Reverse Transfer Capacitance	C_{rss}			50		pF
Switching Characteristics^c						
Turn-On Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = 75\text{V}, I_D = 10\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 6\Omega$		19		ns
Turn-On Rise Time	t_r			8		ns
Turn-Off Delay Time	$t_{\text{d}(\text{off})}$			33		ns
Turn-Off Fall Time	t_f			6		ns
Total Gate Charge	Q_g	$V_{\text{DS}} = 75\text{V}, I_D = 10\text{A}, V_{\text{GS}} = 10\text{V}$		27		nC
Gate-Source Charge	Q_{gs}			5		nC
Gate-Drain Charge	Q_{gd}			10		nC
Drain-Source Diode Characteristics and Maximun Ratings						
Drain-Source Diode Forward Current	I_S				22	A
Drain-Source Diode Forward Voltage ^b	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_S = 22\text{A}$			1.2	V
Notes :						
a.Repetitive Rating : Pulse width limited by maximum junction temperature.						
b.Pulse Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.						
c.Guaranteed by design, not subject to production testing.						
d.L = 0.1mH, $I_{\text{AS}} = 8\text{A}, V_{\text{DD}} = 50\text{V}, R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$.						

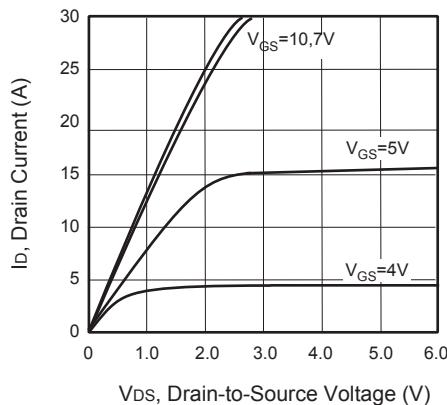


Figure 1. Output Characteristics

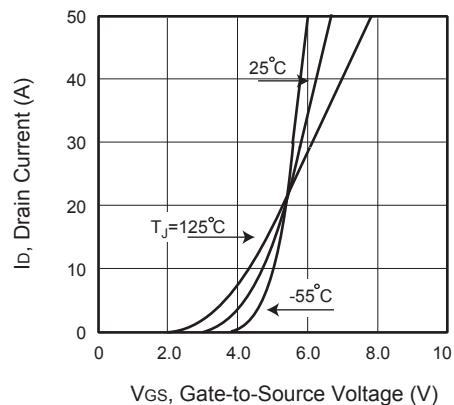


Figure 2. Transfer Characteristics

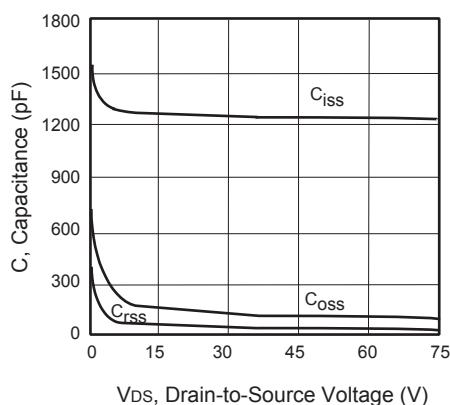


Figure 3. Capacitance

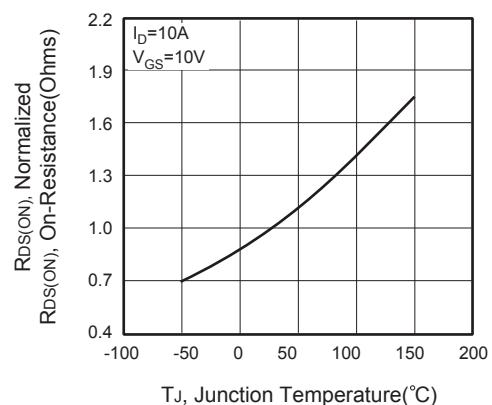


Figure 4. On-Resistance Variation with Temperature

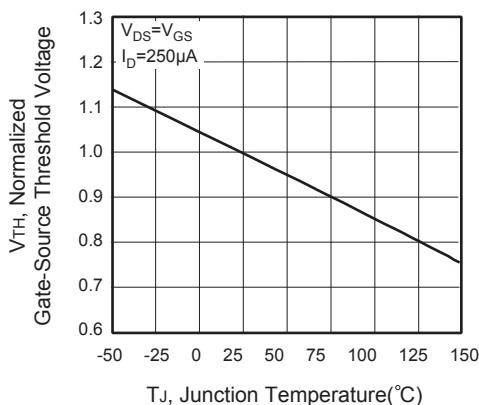


Figure 5. Gate Threshold Variation with Temperature

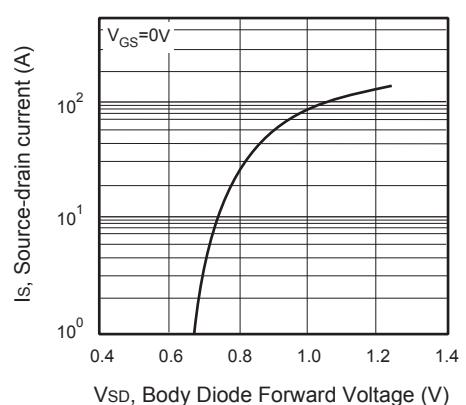


Figure 6. Body Diode Forward Voltage Variation with Source Current

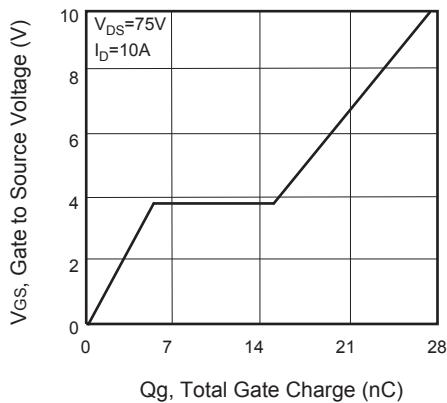


Figure 7. Gate Charge

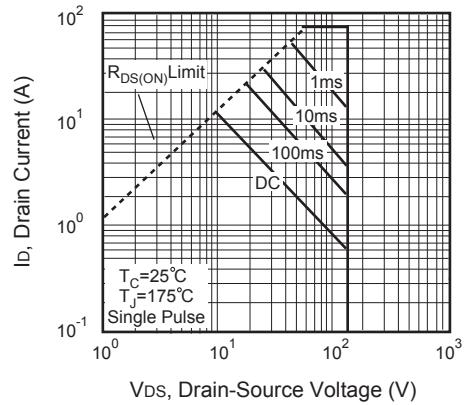


Figure 8. Maximum Safe Operating Area

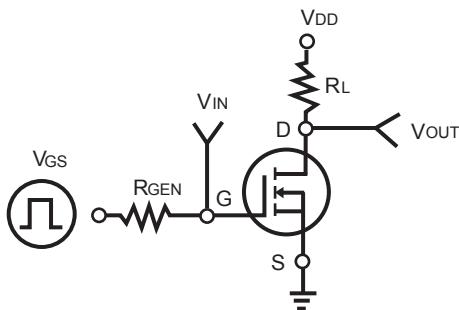


Figure 9. Switching Test Circuit

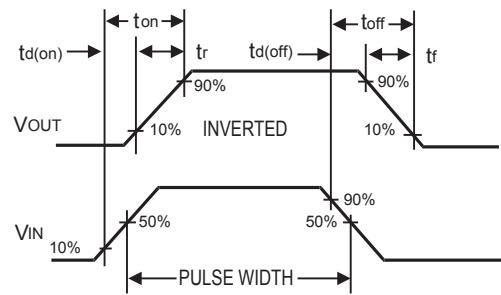


Figure 10. Switching Waveforms

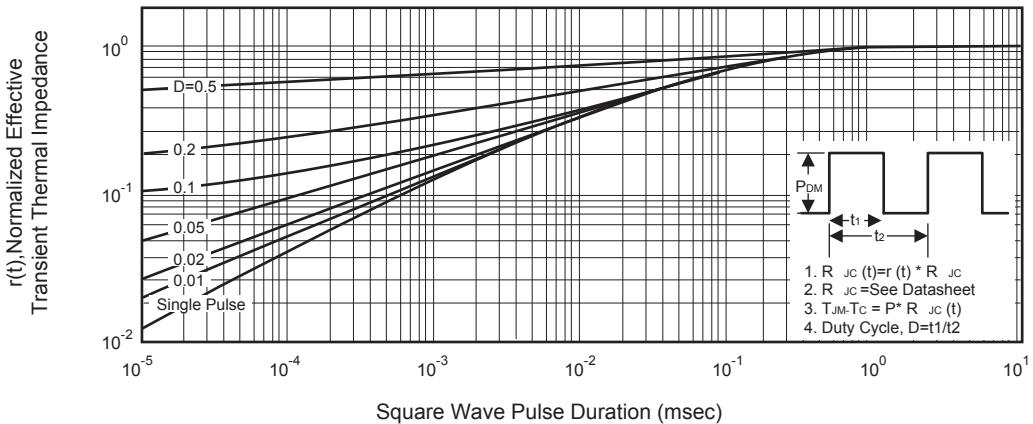


Figure 11. Normalized Thermal Transient Impedance Curve