



CEP14P20/CEB14P20 CEF14P20




P-Channel Enhancement Mode Field Effect Transistor

PRELIMINARY

FEATURES

Type	V _{DSS}	R _{DS(ON)}	I _D	@V _{GS}
CEP14P20	-200V	0.36Ω	-13.5A	-10V
CEB14P20	-200V	0.36Ω	-13.5A	-10V
CEF14P20	-200V	0.36Ω	-13.5A ^d	-10V

- Super high dense cell design for extremely low R_{DS(ON)}.
- High power and current handling capability.
- Lead-free plating ; RoHS compliant.



ABSOLUTE MAXIMUM RATINGS T_C = 25°C unless otherwise noted

Parameter	Symbol	Limit		Units
		TO-220/263	TO-220F	
Drain-Source Voltage	V _{DS}	-200		V
Gate-Source Voltage	V _{GS}	±30		V
Drain Current-Continuous @ T _C = 25 C @ T _C = 100 C	I _D	-13.5	-13.5 ^d	A
		-8.5	-8.5 ^d	A
Drain Current-Pulsed ^a	I _{DM} ^e	-54	-54 ^d	A
Maximum Power Dissipation @ T _C = 25°C - Derate above 25°C	P _D	139	42	W
		1.11	0.33	W/°C
Single Pulsed Avalanche Energy ^h	E _{AS}	273		mJ
Single Pulsed Avalanche Current ^h	I _{AS}	13.5		A
Operating and Store Temperature Range	T _J , T _{stg}	-55 to 150		°C

Thermal Characteristics

Parameter	Symbol	Limit		Units
Thermal Resistance, Junction-to-Case	R _{θJC}	0.9	3	°C/W
Thermal Resistance, Junction-to-Ambient	R _{θJA}	62.5	65	°C/W

This is preliminary information on a new product in development now .
Details are subject to change without notice .

Rev 1. 2012.Mar
<http://www.cet-mos.com>



CEP14P20/CEB14P20 CEF14P20

Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS} = 0V, I_D = -250\mu A$	-200			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -200V, V_{GS} = 0V$			-1	μA
Gate Body Leakage Current, Forward	I_{GSSF}	$V_{GS} = 30V, V_{DS} = 0V$			100	nA
Gate Body Leakage Current, Reverse	I_{GSSR}	$V_{GS} = -30V, V_{DS} = 0V$			-100	nA
On Characteristics^b						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{GS} = V_{DS}, I_D = -250\mu A$	-2		-4	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -6.8A$		0.30	0.36	Ω
Dynamic Characteristics^c						
Input Capacitance	C_{iss}	$V_{DS} = -25V, V_{GS} = 0V, f = 1.0\text{ MHz}$		1620		pF
Output Capacitance	C_{oss}			240		pF
Reverse Transfer Capacitance	C_{rss}			50		pF
Switching Characteristics^c						
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -100V, I_D = -13.5A, V_{GS} = -10V, R_{GEN} = 25\Omega$		28	56	ns
Turn-On Rise Time	t_r			74	148	ns
Turn-Off Delay Time	$t_{d(off)}$			260	520	ns
Turn-Off Fall Time	t_f			120	240	ns
Total Gate Charge	Q_g	$V_{DS} = -160V, I_D = -13.5A, V_{GS} = -10V$		52	68	nC
Gate-Source Charge	Q_{gs}			9		nC
Gate-Drain Charge	Q_{gd}			25		nC
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Current	I_S^f				-13.5	A
Drain-Source Diode Forward Voltage ^b	V_{SD}	$V_{GS} = 0V, I_S = -13.5A^g$			-1.5	V
Notes : □ a.Repetitive Rating : Pulse width limited by maximum junction temperature . b.Pulse Test : Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$. □ c.Guaranteed by design, not subject to production testing. □ d.Limited only by maximum temperature allowed . e.Pulse width limited by safe operating area . f.Full package $I_{S(max)} = 7.4A$. g.Full package V_{SD} test condition $I_S = 7.4A$. □ h.L = 3mH, $I_{AS} = 13.5A$, $V_{DD} = 25V$, $R_G = 25\Omega$, Starting $T_J = 25\text{ C}$.						

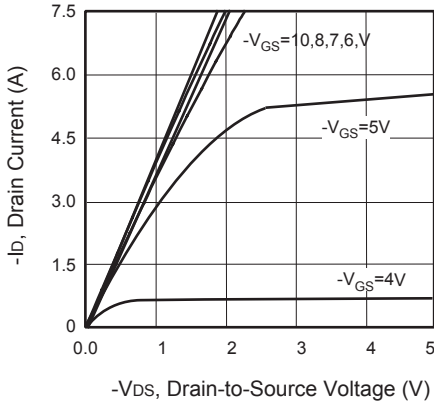


Figure 1. Output Characteristics

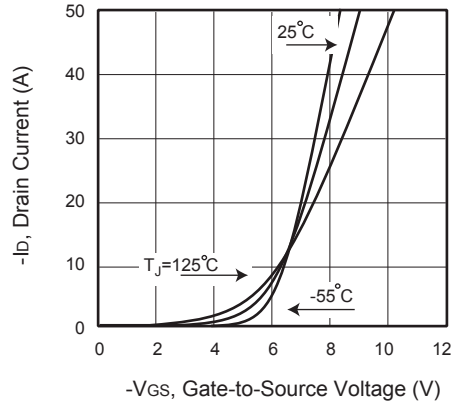


Figure 2. Transfer Characteristics

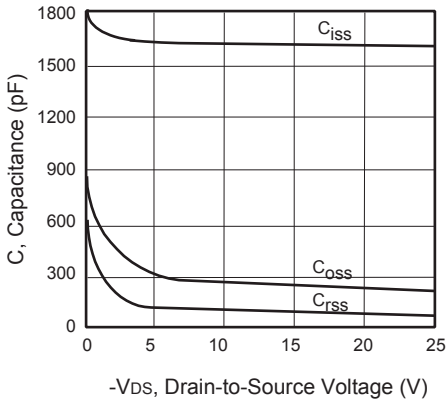


Figure 3. Capacitance

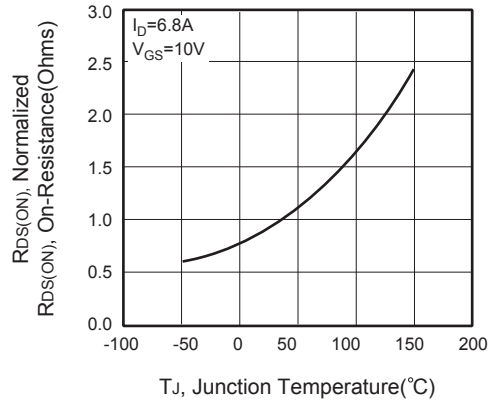


Figure 4. On-Resistance Variation with Temperature

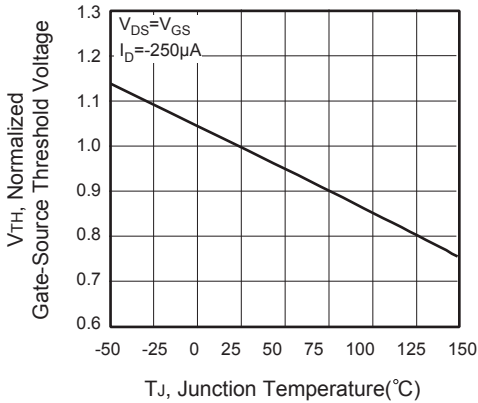


Figure 5. Gate Threshold Variation with Temperature

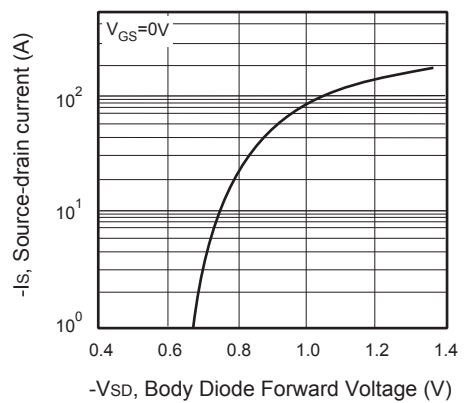


Figure 6. Body Diode Forward Voltage Variation with Source Current

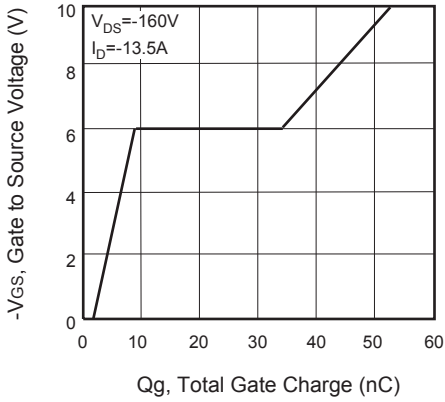


Figure 7. Gate Charge

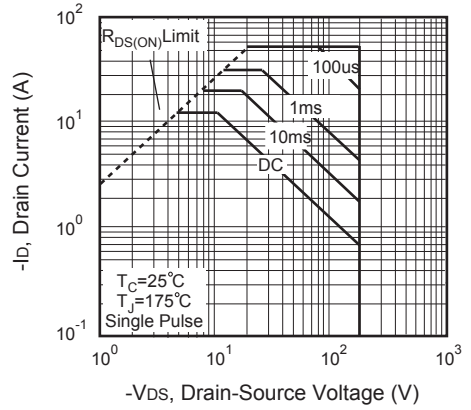


Figure 8. Maximum Safe Operating Area



Figure 9. Switching Test Circuit



Figure 10. Switching Waveforms

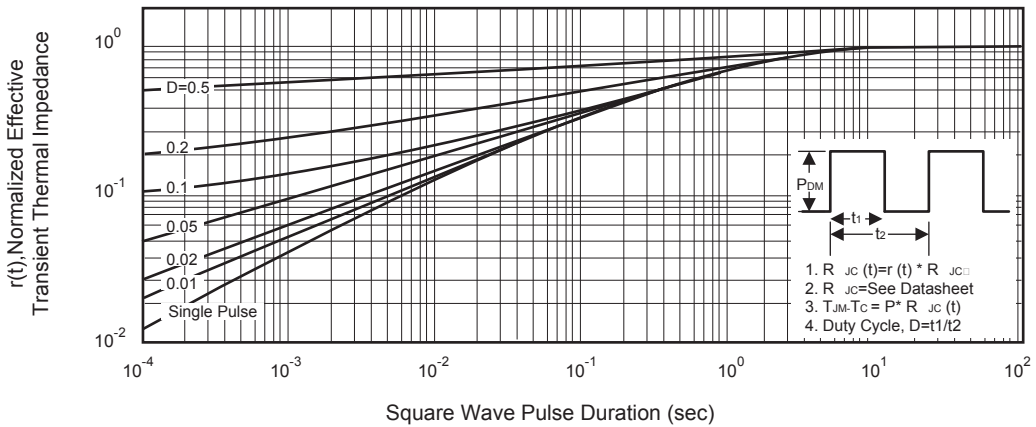


Figure 11. Normalized Thermal Transient Impedance Curve