





CEP630A/CEB630A CEF630A

N-Channel Enhancement Mode Field Effect Transistor

FEATURES

| Type | V _{DSS} | R _{DS(ON)} | I _D | @V _{GS} |
|---------|------------------|---------------------|-------------------|------------------|
| CEP630A | 200V | 380mΩ | 9.3A | 10V |
| CEB630A | 200V | 380mΩ | 9.3A | 10V |
| CEF630A | 200V | 380mΩ | 9.3A ^d | 10V |

- Super high dense cell design for extremely low R_{DS(ON)}.
- High power and current handing capability.
- Pb-free lead plating ; RoHS compliant.
- Halogen Free.



ABSOLUTE MAXIMUM RATINGS

T_C = 25°C unless otherwise noted

| Parameter | Symbol | Limit | | Units |
|--|-----------------------------------|------------|--------------------------------------|-----------|
| | | TO-220/263 | TO-220F | |
| Drain-Source Voltage | V _{DS} | 200 | | V |
| Gate-Source Voltage | V _{GS} | ± 20 | | V |
| Drain Current-Continuous @ T _C = 25°C @ T _C = 100°C | I _D | 9.3 5.9 | 9.3 ^d 5.9 ^d | A |
| Drain Current-Pulsed ^a | I _{DM} ^e | 37.2 | 37.2 ^d | A |
| Maximum Power Dissipation @ T _C = 25°C - Derate above 25°C | P _D | 69 0.55 | 33 0.26 | W W/°C |
| Single Pulsed Avalanche Energy ^g | E _{AS} | 7.2 | | mJ |
| Single Pulsed Avalanche Current ^g | I _{AS} | 3.8 | | A |
| Operating and Store Temperature Range | T _J , T _{stg} | -55 to 150 | | °C |

Thermal Characteristics

| Parameter | Symbol | Limit | | Units |
|---|------------------|-------|-----|-------|
| Thermal Resistance, Junction-to-Case | R _{θJC} | 1.8 | 3.8 | °C/W |
| Thermal Resistance, Junction-to-Ambient | R _{θJA} | 62.5 | 65 | °C/W |



CEP630A/CEB630A CEF630A

Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted

| Parameter | Symbol | Test Condition | Min | Typ | Max | Units |
|---|----------------------------|---|-----|------|-----|------------------|
| Off Characteristics | | | | | | |
| Drain-Source Breakdown Voltage | BV_{DSS} | $V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$ | 200 | | | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{\text{DS}} = 200\text{V}, V_{\text{GS}} = 0\text{V}$ | | 1 | | μA |
| Gate Body Leakage Current, Forward | I_{GSSF} | $V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0\text{V}$ | | 100 | | nA |
| Gate Body Leakage Current, Reverse | I_{GSSR} | $V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0\text{V}$ | | -100 | | nA |
| On Characteristics^b | | | | | | |
| Gate Threshold Voltage | $V_{\text{GS}(\text{th})}$ | $V_{\text{GS}} = V_{\text{DS}}, I_D = 250\mu\text{A}$ | 2 | | 4 | V |
| Static Drain-Source On-Resistance | $R_{\text{DS}(\text{on})}$ | $V_{\text{GS}} = 10\text{V}, I_D = 5\text{A}$ | | 320 | 380 | $\text{m}\Omega$ |
| Dynamic Characteristics^c | | | | | | |
| Input Capacitance | C_{iss} | $V_{\text{DS}} = 25\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$ | | 580 | | pF |
| Output Capacitance | C_{oss} | | | 85 | | pF |
| Reverse Transfer Capacitance | C_{rss} | | | 15 | | pF |
| Switching Characteristics^c | | | | | | |
| Turn-On Delay Time | $t_{\text{d}(\text{on})}$ | $V_{\text{DD}} = 100\text{V}, I_D = 5\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 25\Omega$ | | 17 | | ns |
| Turn-On Rise Time | t_r | | | 12 | | ns |
| Turn-Off Delay Time | $t_{\text{d}(\text{off})}$ | | | 44 | | ns |
| Turn-Off Fall Time | t_f | | | 14 | | ns |
| Total Gate Charge | Q_g | $V_{\text{DS}} = 160\text{V}, I_D = 6\text{A}, V_{\text{GS}} = 10\text{V}$ | | 11 | | nC |
| Gate-Source Charge | Q_{gs} | | | 2 | | nC |
| Gate-Drain Charge | Q_{gd} | | | 5 | | nC |
| Drain-Source Diode Characteristics and Maximum Ratings | | | | | | |
| Drain-Source Diode Forward Current | I_S ^f | | | | 9.3 | A |
| Drain-Source Diode Forward Voltage ^b | V_{SD} | $V_{\text{GS}} = 0\text{V}, I_S = 9\text{A}$ | | | 1.5 | V |

Notes :

a.Repetitive Rating : Pulse width limited by maximum junction temperature .

b.Pulse Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

c.Guaranteed by design, not subject to production testing.

d.Limited only by maximum temperature allowed .

e.Pulse width limited by safe operating area .

f.Full package $I_{\text{S}(\text{max})} = 6.4\text{A}$.

g.L = 1mH, $I_{AS} = 3.8\text{A}$, $V_{DD} = 25\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$.

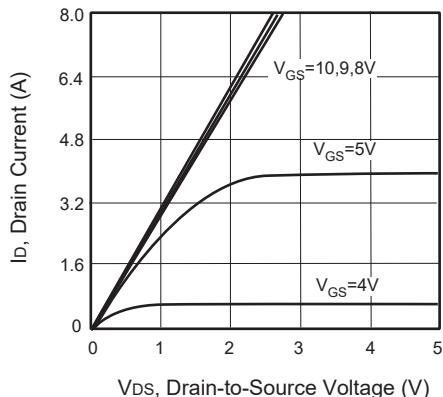


Figure 1. Output Characteristics

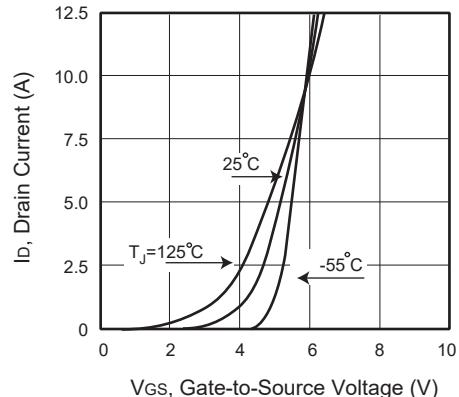


Figure 2. Transfer Characteristics

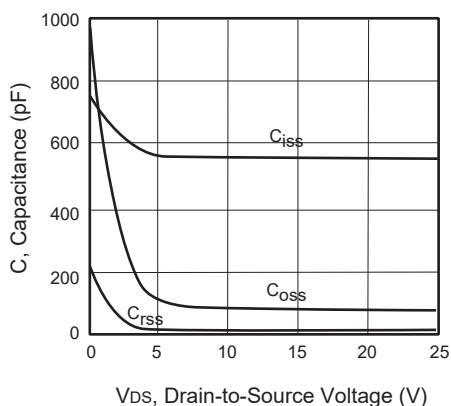


Figure 3. Capacitance

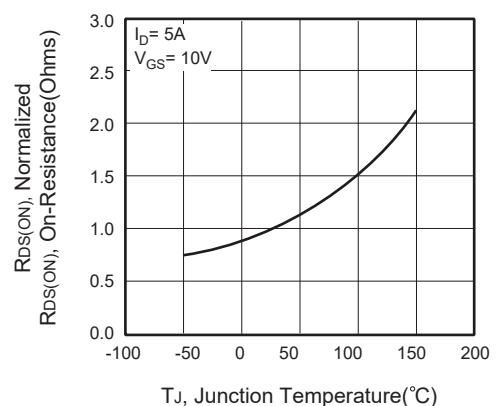


Figure 4. On-Resistance Variation with Temperature

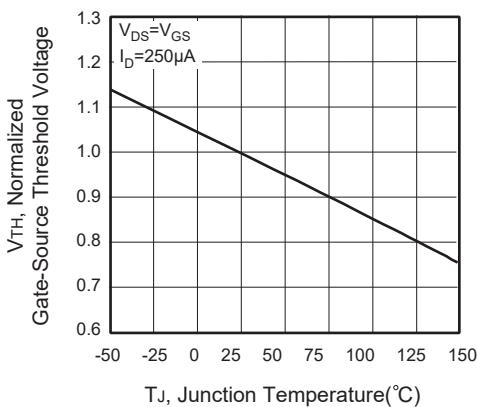


Figure 5. Gate Threshold Variation with Temperature

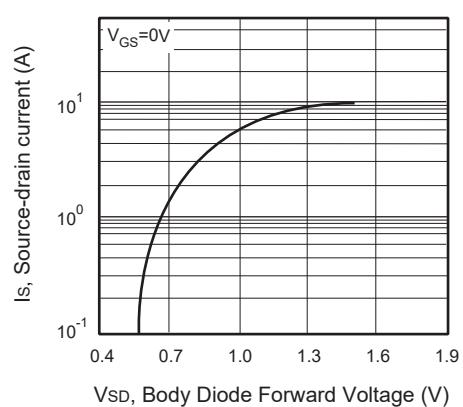


Figure 6. Body Diode Forward Voltage Variation with Source Current

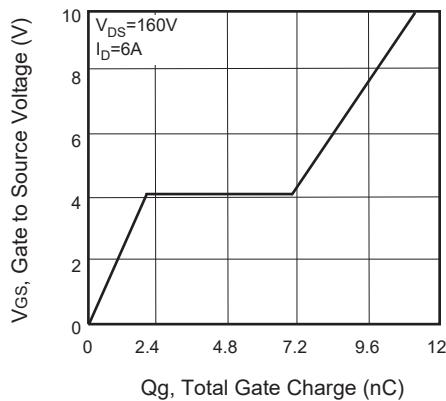


Figure 7. Gate Charge

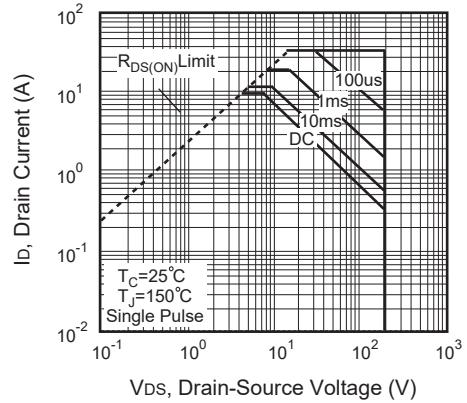


Figure 8. Maximum Safe Operating Area

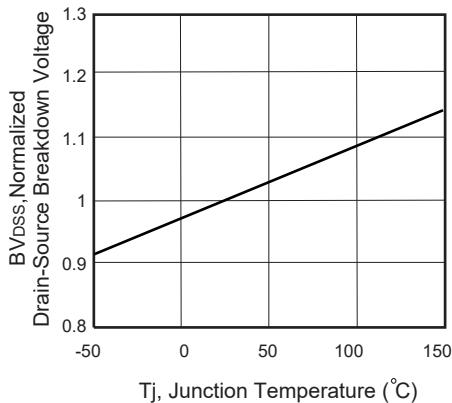


Figure 9. Breakdown Voltage Variation VS Temperature

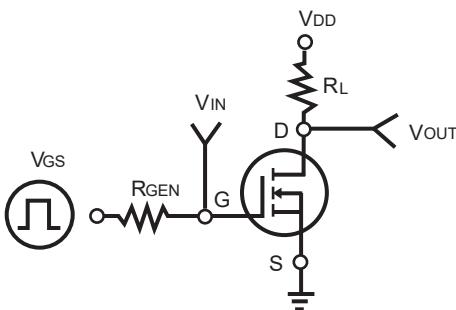


Figure 10. Switching Test Circuit

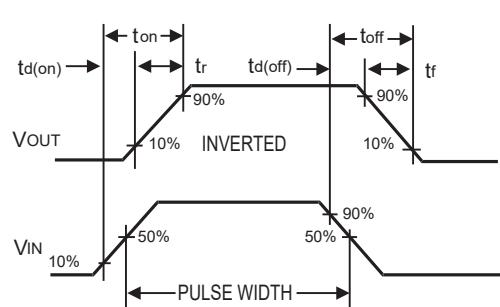


Figure 11. Switching Waveforms



CEP630A/CEB630A CEF630A

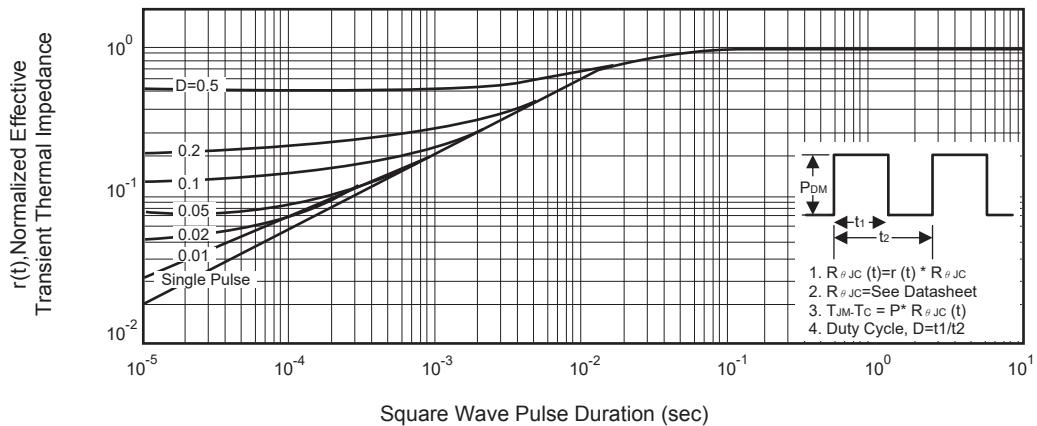


Figure 12. Normalized Thermal Transient Impedance Curve