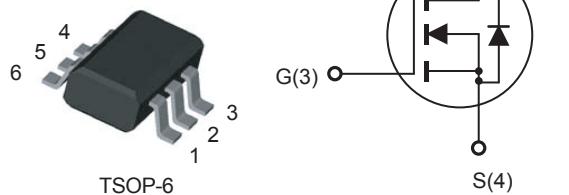


N-Channel Enhancement Mode Field Effect Transistor

PRELIMINARY

FEATURES

- 110V, 2.3A, $R_{DS(ON)} = 360\text{m}\Omega$ @ $V_{GS} = 10\text{V}$.
 $R_{DS(ON)} = 420\text{m}\Omega$ @ $V_{GS} = 4.5\text{V}$.
- High dense cell design for extremely low $R_{DS(ON)}$.
- Rugged and reliable.
- RoHS compliant.
- TSOP-6 package.

ABSOLUTE MAXIMUM RATINGS $T_A = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V_{DS}	110	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous@ R_{eJL} @ R_{eJA}	I_D	2.3	A
		1.8	A
Drain Current-Pulsed ^a @ R_{eJL} @ R_{eJA}	I_{DM}	9.2	A
		7.2	A
Maximum Power Dissipation	P_D	3.1	W
Operating and Store Temperature Range	T_J, T_{Stg}	-55 to 150	°C

Thermal Characteristics

Parameter	Symbol	Limit	Units
Thermal Resistance, Junction-to-Ambient ^b	R_{eJA}	62.5	°C/W
Thermal Resistance, Junction-to-Lead	R_{eJL}	40	°C/W









CEH2352

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	110			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 110\text{V}, V_{\text{GS}} = 0\text{V}$		1		μA
Gate Body Leakage Current, Forward	I_{GSSF}	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0\text{V}$		100		nA
Gate Body Leakage Current, Reverse	I_{GSSR}	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0\text{V}$		-100		nA
On Characteristics^c						
Gate Threshold Voltage	$V_{\text{GS(th)}}$	$V_{\text{GS}} = V_{\text{DS}}, I_D = 250\mu\text{A}$	1		3	V
Static Drain-Source On-Resistance	$R_{\text{DS(on)}}$	$V_{\text{GS}} = 10\text{V}, I_D = 1\text{A}$		300	360	$\text{m}\Omega$
		$V_{\text{GS}} = 4.5\text{V}, I_D = 1\text{A}$		320	420	$\text{m}\Omega$
Dynamic Characteristics^d						
Input Capacitance	C_{iss}	$V_{\text{DS}} = 25\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		360		pF
Output Capacitance	C_{oss}			75		pF
Reverse Transfer Capacitance	C_{rss}			35		pF
Switching Characteristics^d						
Turn-On Delay Time	$t_{\text{d(on)}}$	$V_{\text{DD}} = 50\text{V}, I_D = 2.3\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 3.3\Omega$		10.7		ns
Turn-On Rise Time	t_r			3.5		ns
Turn-Off Delay Time	$t_{\text{d(off)}}$			24.7		ns
Turn-Off Fall Time	t_f			2.9		ns
Total Gate Charge	Q_g	$V_{\text{DS}} = 80\text{V}, I_D = 2.3\text{A}, V_{\text{GS}} = 10\text{V}$		9.3		nC
Gate-Source Charge	Q_{gs}			0.9		nC
Gate-Drain Charge	Q_{gd}			3.2		nC
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Current ^b	I_S			2.3		A
Drain-Source Diode Forward Voltage ^c	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_S = 1\text{A}$		1.2		V

Notes :

- a.Repetitive Rating : Pulse width limited by maximum junction temperature.
- b.Surface Mounted on FR4 Board, t ≤ 5 sec.
- c.Pulse Test : Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.
- d.Guaranteed by design, not subject to production testing.

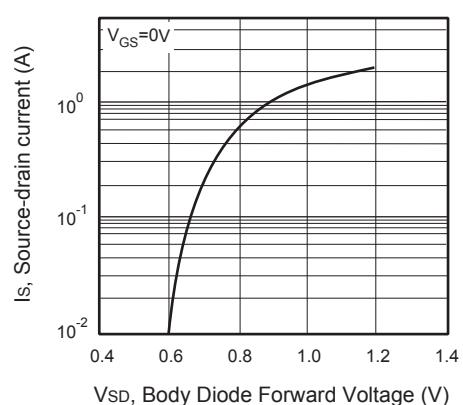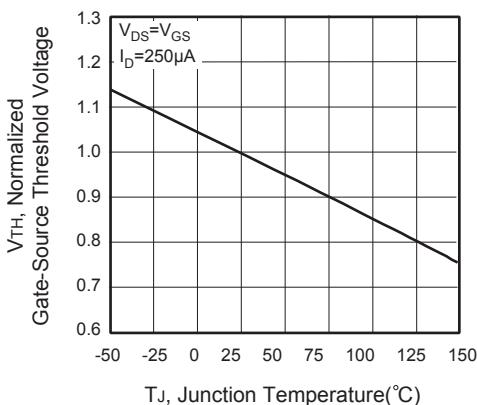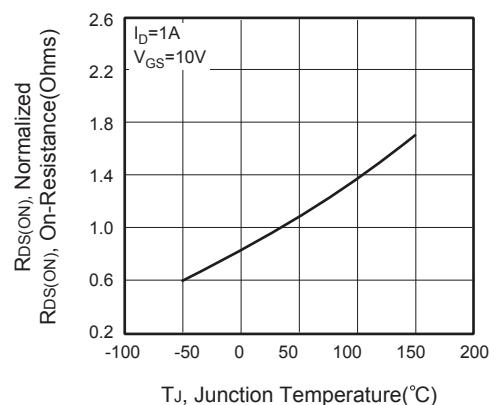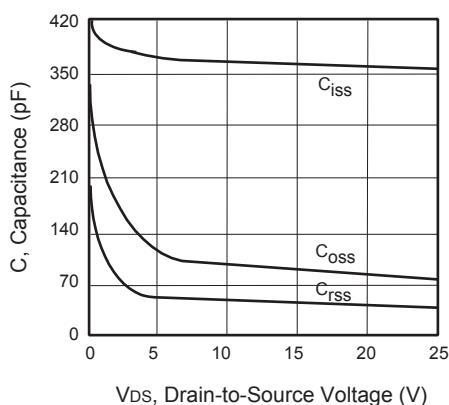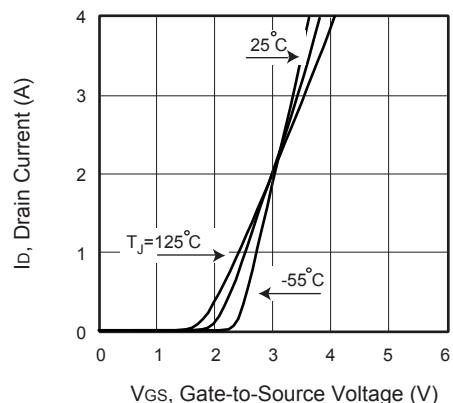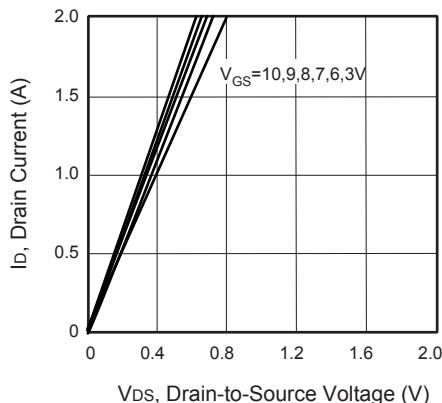

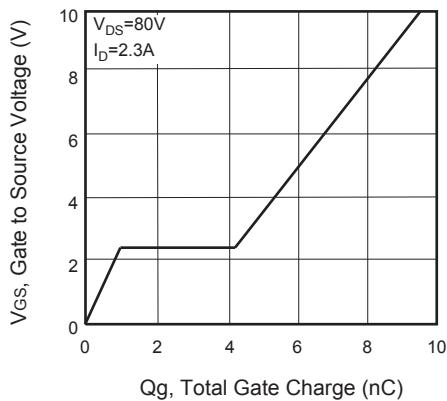


Figure 7. Gate Charge

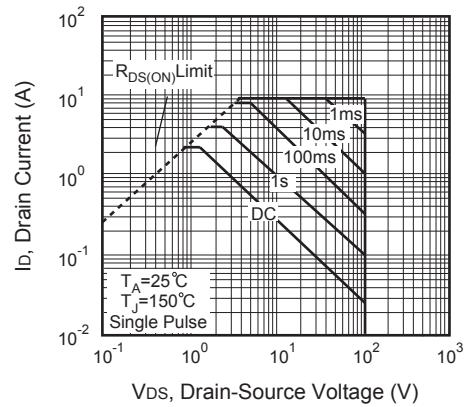


Figure 8. Maximum Safe Operating Area

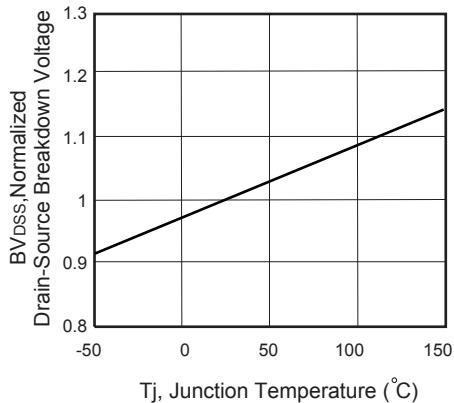


Figure 9. Breakdown Voltage Variation VS Temperature

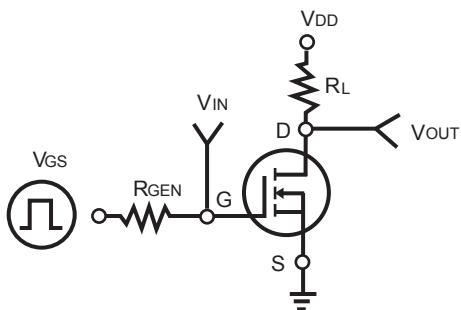


Figure 10. Switching Test Circuit

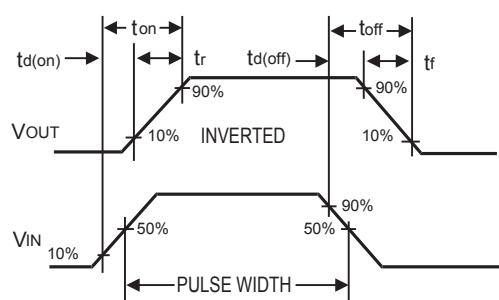


Figure 11. Switching Waveforms

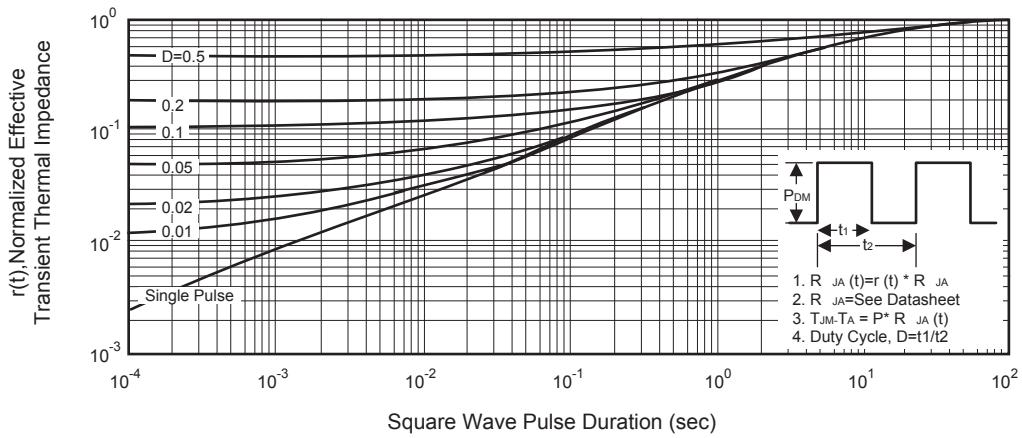


Figure 12. Normalized Thermal Transient Impedance Curve